


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF9L-WGX53
光束	700 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

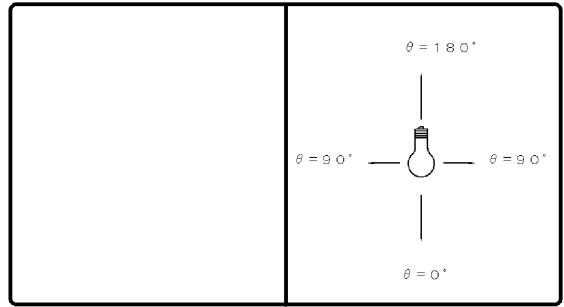

効率	F		%
	F		%
	F	100	%
	器具光束	700	lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		1172	
10°		918	
20°		615	
30°		370	
40°		196	
50°		100	
60°		60	
70°		39	
80°		23	
90°		9	
100°		6	
110°		4	
120°		3	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
床		30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	照明率 (×0.01)																			
0.60	74	68	62	59	55	53	72	67	61	58	54	53	60	57	53	52	53	52	48	47
0.80	84	76	72	68	64	62	82	75	71	67	64	61	69	66	62	61	61	60	56	55
1.00	92	83	81	75	73	69	90	81	79	74	72	69	76	72	70	68	69	67	63	61
1.25	98	87	87	80	79	74	95	86	85	79	78	74	82	77	76	73	74	72	68	66
1.50	102	90	92	84	85	79	99	89	90	83	83	78	86	81	81	77	78	76	72	70
2.00	109	95	100	89	93	85	105	93	97	88	91	84	92	86	87	82	84	81	78	76
2.50	113	97	105	92	98	88	109	96	102	91	96	88	96	89	92	86	88	84	81	79
3.00	115	99	108	95	102	91	111	97	105	94	100	90	99	91	95	89	91	87	84	82
4.00	119	101	113	98	108	95	115	100	110	97	105	94	103	94	100	92	95	90	88	86
5.00	121	103	117	100	112	98	117	101	113	99	109	97	106	96	103	94	97	92	90	88
10.00	126	106	124	104	121	103	121	104	119	103	117	102	111	100	110	100	103	97	96	93

