


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF9N-GX53
光束	770 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

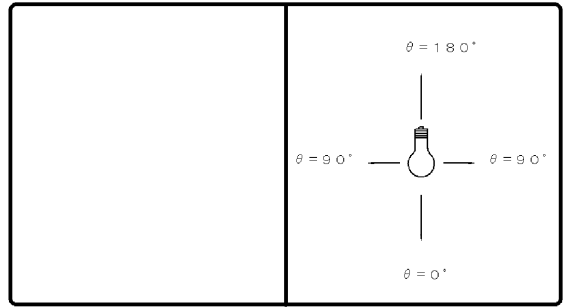

効率	F	%
	F	%
	F	100 %
	器具光束	770 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		360	
10°		353	
20°		329	
30°		291	
40°		243	
50°		189	
60°		136	
70°		87	
80°		42	
90°		15	
100°		12	
110°		11	
120°		10	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0						
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0													
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室指数		照明率 (×0.01)																												
0.60		60	56	46	44	37	36	58	54	45	43	37	36	43	41	36	35	35	34	29	27									
0.80		71	65	57	53	47	45	69	63	55	52	47	45	53	50	45	44	44	43	38	36									
1.00		81	72	66	62	57	54	78	71	65	60	56	53	62	58	54	52	52	51	46	43									
1.25		88	78	74	68	65	61	85	76	72	67	64	60	69	65	61	59	59	57	52	50									
1.50		94	83	81	74	72	66	90	81	79	72	70	66	74	70	67	64	65	62	58	55									
2.00		102	88	91	81	82	75	98	86	88	80	80	74	83	77	76	72	73	70	66	63									
2.50		107	92	97	86	89	80	102	90	94	84	86	79	88	81	82	77	78	75	71	68									
3.00		110	94	101	89	94	84	106	93	98	87	91	83	92	84	86	81	82	78	75	72									
4.00		115	98	108	93	101	89	110	96	104	92	98	88	97	89	92	85	87	83	80	77									
5.00		118	100	112	96	106	92	113	98	108	94	103	91	100	91	96	89	91	86	83	80									
10.00		124	103	120	101	117	99	119	102	116	100	113	98	107	97	105	95	98	92	90	87									

