


東芝照明器具配光データシート

| | |
|----|-------------|
| 名称 | 東芝LED照明器具 |
| 形名 | LEDG-02805W |

| | | |
|-----|---|------|
| 保守率 | 良 | 0.67 |
| | 中 | 0.63 |
| | 否 | 0.56 |


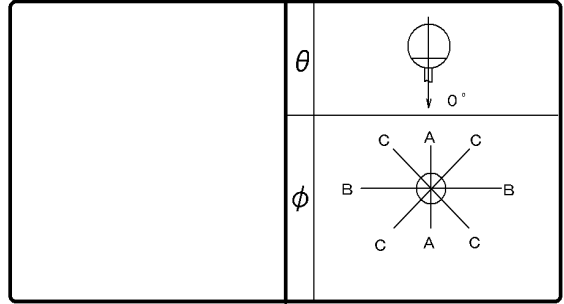


| | | |
|----|----|-------------|
| 光源 | 名称 | - |
| | 形名 | - |
| | 光束 | 1390 lm × 1 |

| | | |
|----|-----------------|---------|
| 効率 | F $\frac{1}{2}$ | 32.3 % |
| | F $\frac{3}{4}$ | 67.7 % |
| | F \bigcirc | 100 % |
| | 器具光束 | 1390 lm |

備考

| | |
|-----|-----------|
| 前面 | グローブ (乳白) |
| 反射面 | |

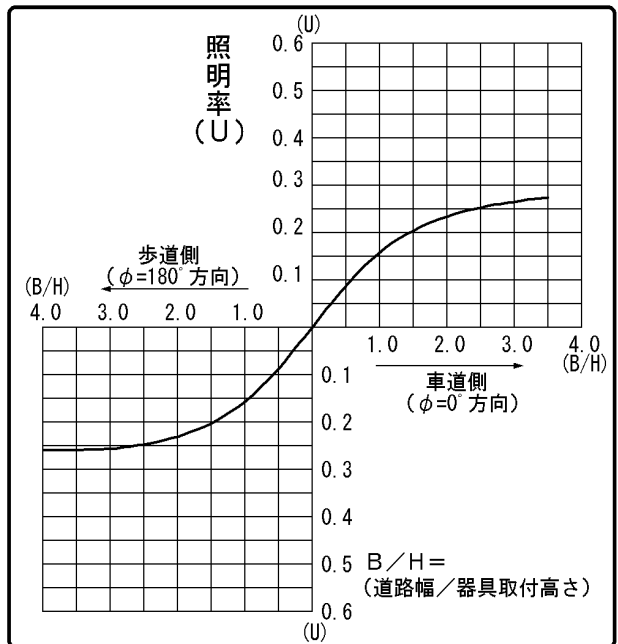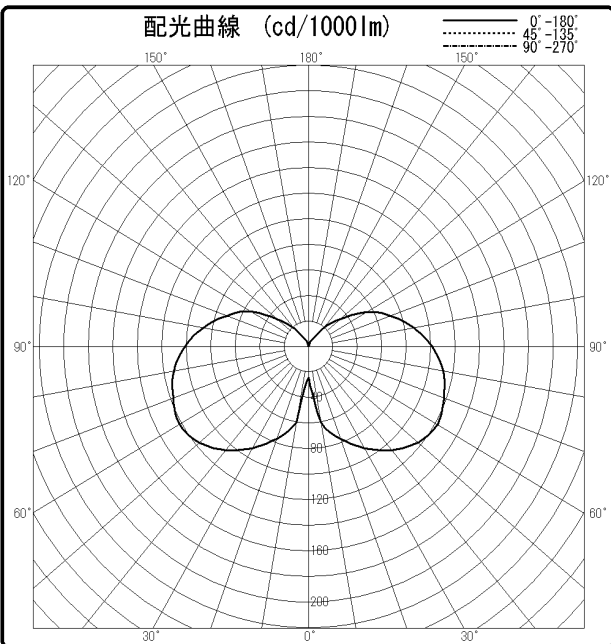

| $\theta \backslash \phi$ | 0° | 45° | 90° | 135° | 180° |
|--------------------------|-----|-----|-----|------|------|
| 0° | 24 | | | | |
| 10° | 60 | | | | |
| 20° | 77 | | | | |
| 30° | 92 | | | | |
| 40° | 106 | | | | |
| 50° | 117 | | | | |
| 60° | 122 | | | | |
| 70° | 118 | | | | |
| 80° | 112 | | | | |
| 90° | 101 | | | | |
| 100° | 87 | | | | |
| 110° | 71 | | | | |
| 120° | 55 | | | | |
| 130° | 34 | | | | |
| 140° | 19 | | | | |
| 150° | 8 | | | | |
| 160° | 5 | | | | |
| 170° | 0 | | | | |
| 180° | 0 | | | | |

