


東芝照明器具配光データシート

名称	東芝LED屋内用ライン器具
形名	LEDL-09301N-LS1

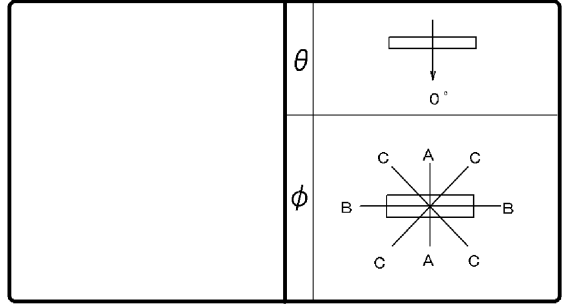

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	910 lm

保守率	良	0.67
	中	0.63
	否	0.56

前面	カバー (フロスト)
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	382	382	382
10°	375	375	375
20°	352	352	352
30°	312	313	315
40°	259	261	262
50°	199	200	201
60°	136	138	139
70°	79	84	84
80°	31	38	37
90°	5	10	9
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10					
室指数	固有照明率 (×0.01)																			
0.60	61	57	47	45	38	37	60	55	46	44	38	37	45	43	37	36	36	36	31	29
0.80	73	66	58	54	49	47	70	64	57	54	48	46	55	52	47	46	46	45	40	38
1.00	82	74	68	63	58	55	79	72	66	62	57	55	64	60	56	54	55	53	48	46
1.25	89	79	76	70	67	62	86	78	74	69	66	62	71	67	64	61	62	60	55	53
1.50	95	84	83	75	73	68	92	82	81	74	72	68	77	72	70	66	68	65	61	59
2.00	103	90	92	82	84	76	100	88	90	81	82	76	85	79	79	74	76	73	69	67
2.50	108	93	99	87	91	82	104	92	96	86	89	81	91	84	85	79	81	78	74	72
3.00	112	96	103	90	96	86	108	94	100	89	94	85	94	87	89	83	85	82	78	76
4.00	116	99	109	94	103	91	112	97	106	93	100	90	99	91	95	88	90	86	83	81
5.00	119	101	113	97	108	94	114	99	109	96	105	93	103	94	99	91	94	89	86	84
10.00	125	104	121	102	118	101	120	103	117	101	114	99	109	99	107	97	101	95	93	91

