


東芝ランプ 配光データシート

名称	LED電球 ミニクリプトン形
形名	LDA5L-E17/C
光束	300 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

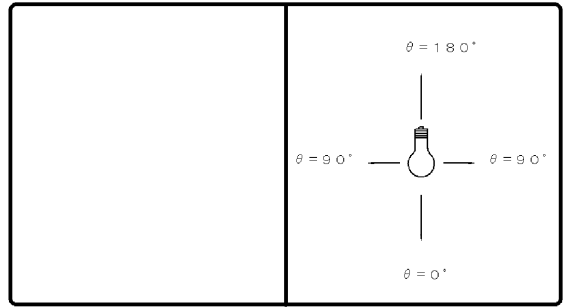

効率	F	%
	F	%
	F	100 %
	器具光束	300 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	239		
10°	234		
20°	197		
30°	187		
40°	179		
50°	172		
60°	155		
70°	139		
80°	89		
90°	45		
100°	34		
110°	23		
120°	16		
130°	4		
140°	1		
150°	1		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	照明率 (×0.01)																								
0.60	54	50	39	37	29	29	52	48	38	36	29	28	35	34	27	27	26	25	20	18					
0.80	65	59	49	46	38	37	62	56	47	44	37	36	44	42	36	34	34	33	27	25					
1.00	74	66	58	53	47	44	70	64	56	52	46	43	52	49	43	41	41	40	34	31					
1.25	81	72	66	60	55	51	77	69	63	58	53	50	59	55	50	48	47	46	40	37					
1.50	87	77	72	66	61	57	83	74	70	64	60	56	64	60	56	53	53	51	45	42					
2.00	96	83	82	74	72	66	91	80	79	72	70	64	73	68	65	61	61	59	53	49					
2.50	101	87	89	79	80	72	96	84	85	77	77	70	79	73	72	67	67	64	59	55					
3.00	105	90	94	83	86	76	100	87	90	81	82	75	83	76	76	71	71	68	63	59					
4.00	110	94	102	88	94	82	105	91	97	86	90	81	89	81	83	77	77	74	69	65					
5.00	114	96	106	91	99	86	108	93	101	89	95	85	93	84	88	81	81	77	73	69					
10.00	121	101	117	98	113	96	115	99	111	96	108	94	101	92	99	89	91	86	82	78					

