


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-09921ML-LS9

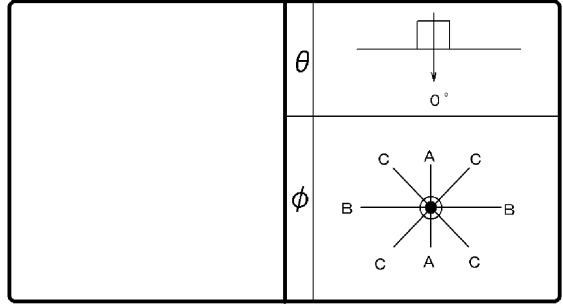

効 率	F $\frac{1}{2}$	0 %
	F $\frac{1}{4}$	100 %
	F $\frac{1}{8}$	100 %
	器具光束	860 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	カバー (フロスト)
反射面	白色

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	449		
10°	439		
20°	406		
30°	358		
40°	298		
50°	220		
60°	139		
70°	27		
80°	2		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室指数	固有照明率 (×0.01)																																				
0.60	68	62	55	52	47	45	66	61	54	51	46	45	52	50	46	44	45	44	40	38																	
0.80	81	73	68	64	60	57	79	72	67	63	59	57	65	62	58	56	57	56	52	50																	
1.00	88	79	76	70	67	64	86	78	74	69	66	63	72	68	65	63	64	62	58	56																	
1.25	96	85	84	77	76	71	93	83	82	76	75	70	79	75	73	70	71	69	65	63																	
1.50	100	88	90	81	82	76	97	87	88	80	80	75	84	79	78	74	76	73	70	68																	
2.00	108	94	99	88	92	84	105	93	97	87	90	83	92	86	87	82	84	81	77	76																	
2.50	112	97	104	92	98	88	109	95	101	91	96	87	96	89	92	86	88	85	82	80																	
3.00	115	99	108	95	102	91	112	98	105	94	100	90	100	92	96	89	92	88	85	83																	
4.00	119	101	114	98	109	95	115	100	110	97	106	95	104	95	101	93	96	91	89	87																	
5.00	122	103	117	100	112	98	117	101	113	99	109	97	106	97	104	95	98	94	91	89																	
10.00	126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	94																	

