


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-15921ML-LS9

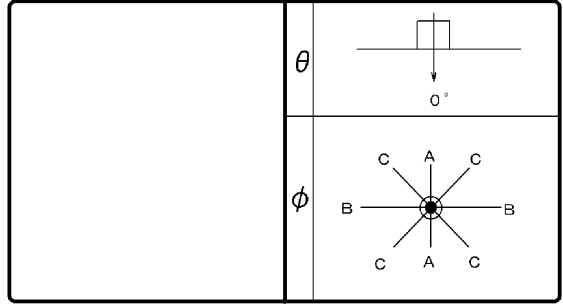

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	1270 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	カバー (フロスト)
反射面	白色

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	454		
10°	444		
20°	411		
30°	362		
40°	300		
50°	219		
60°	134		
70°	26		
80°	2		
90°	1		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0								
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10					
室指数	固有照明率 (×0.01)																																							
0.60	68	63	55	52	47	46	66	62	54	52	47	45	53	51	46	45	45	44	40	39	68	63	55	52	47	46	66	62	54	52	47	45	53	51	46	45	45	44	40	39
0.80	81	74	68	64	60	58	79	72	67	64	60	57	65	62	58	57	57	56	52	50	81	74	68	64	60	58	79	72	67	64	60	57	65	62	58	57	57	56	52	50
1.00	88	79	76	70	68	64	86	78	75	70	67	64	72	68	65	63	64	62	58	57	88	79	76	70	68	64	86	78	75	70	67	64	72	68	65	63	64	62	58	57
1.25	96	85	84	77	76	71	93	84	83	76	75	71	79	75	73	70	71	69	65	63	96	85	84	77	76	71	93	84	83	76	75	71	79	75	73	70	71	69	65	63
1.50	101	89	90	82	82	76	98	87	88	81	81	76	84	79	78	75	76	74	70	68	101	89	90	82	82	76	98	87	88	81	81	76	84	79	78	75	76	74	70	68
2.00	108	94	99	89	92	84	105	93	97	88	90	83	92	86	87	82	84	81	78	76	108	94	99	89	92	84	105	93	97	88	90	83	92	86	87	82	84	81	78	76
2.50	112	97	104	92	98	88	109	96	102	91	96	87	97	89	92	86	88	85	82	80	112	97	104	92	98	88	109	96	102	91	96	87	97	89	92	86	88	85	82	80
3.00	115	99	108	95	102	91	112	98	105	94	100	91	100	92	96	89	92	88	85	83	115	99	108	95	102	91	112	98	105	94	100	91	100	92	96	89	92	88	85	83
4.00	119	101	114	98	109	96	115	100	110	97	106	95	104	95	101	93	96	91	89	87	119	101	114	98	109	96	115	100	110	97	106	95	104	95	101	93	96	91	89	87
5.00	122	103	117	100	113	98	117	102	113	99	109	97	107	97	104	95	98	94	91	90	122	103	117	100	113	98	117	102	113	99	109	97	107	97	104	95	98	94	91	90
10.00	126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	94	126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	94

