


東芝ランプ 配光データシート

名称	東芝LED電球ホール電球
形名	LDG10N-D/G9 5
光束	650 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

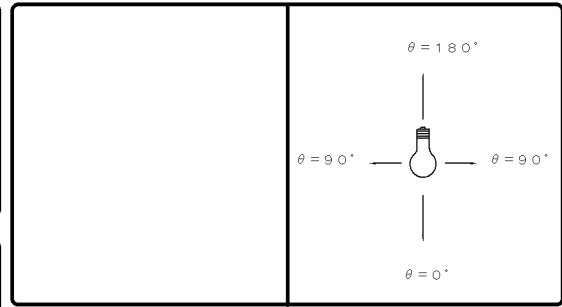

効 率	F	%
	F	%
	F	100 %
	器具 光束	650 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
データは初期の標準値です

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	122		
10°	121		
20°	116		
30°	109		
40°	100		
50°	89		
60°	79		
70°	68		
80°	57		
90°	47		
100°	37		
110°	29		
120°	22		
130°	16		
140°	12		
150°	8		
160°	5		
170°	3		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10									
室指数	照 明 率 (×0.01)																																				
0.60	34	32	25	23	19	18	32	30	23	22	18	17	21	20	17	16	15	15	12	10																	
0.80	41	37	31	29	24	23	38	35	29	28	23	22	26	25	21	21	20	19	16	13																	
1.00	46	42	36	34	29	28	43	39	34	32	28	27	31	29	26	25	24	23	19	17																	
1.25	51	45	41	38	34	32	48	43	39	36	33	31	35	33	30	29	27	27	23	20																	
1.50	54	48	45	41	38	36	51	46	43	39	37	34	38	36	33	32	30	29	25	23																	
2.00	60	52	51	46	45	41	56	49	49	44	43	39	43	40	39	36	35	34	30	27																	
2.50	63	54	55	49	49	44	59	52	52	47	47	43	47	43	42	40	38	37	33	29																	
3.00	65	56	59	51	53	47	61	54	55	49	50	45	49	45	45	42	41	39	35	32																	
4.00	69	58	63	54	58	51	64	56	59	52	55	49	53	48	49	45	44	42	38	35																	
5.00	71	60	66	56	61	53	66	57	62	54	58	51	55	50	52	48	46	44	41	37																	
10.00	75	63	72	61	69	59	71	60	68	59	65	57	60	54	58	53	52	49	46	42																	

