


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF21L-GX53
光束	1530 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

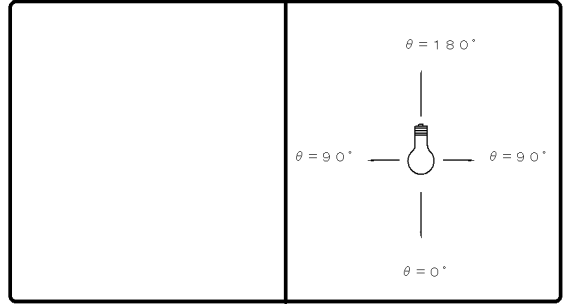

効率	F	%
	F	%
	F	100 %
	器具光束	1530 lm

最大取付間隔	
A-A	1.5 H
B-B	1.5 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		192	
10°		191	
20°		189	
30°		188	
40°		187	
50°		184	
60°		170	
70°		141	
80°		104	
90°		39	
100°		12	
110°		5	
120°		6	
130°		6	
140°		5	
150°		5	
160°		3	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0								
	壁	70	50	30	70	50	30	50	30	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
室指数	照明率 (×0.01)																															
0.60	53	49	37	35	28	27	51	47	36	34	27	26	34	33	26	25	25	25	19	17												
0.80	63	57	47	44	37	35	61	55	46	43	36	35	43	41	34	33	33	32	27	24												
1.00	72	65	56	52	45	43	69	63	54	51	44	42	51	48	42	41	40	39	33	31												
1.25	80	71	64	59	53	50	76	68	62	57	52	49	58	55	49	47	47	45	40	37												
1.50	86	75	71	64	60	56	82	73	68	63	58	55	64	60	55	53	53	51	45	42												
2.00	94	82	81	72	71	64	90	80	78	71	69	63	73	68	65	61	61	59	53	50												
2.50	100	86	88	78	78	71	95	84	85	76	76	69	79	73	71	67	67	65	59	56												
3.00	104	89	93	82	84	75	99	87	90	80	82	74	83	76	76	71	72	69	64	61												
4.00	109	93	100	87	93	81	104	91	96	85	89	80	89	82	84	77	78	75	70	67												
5.00	113	95	105	90	98	86	108	93	101	88	95	84	93	85	88	81	82	78	74	71												
10.00	120	101	116	98	112	95	115	99	111	96	107	93	102	92	99	90	92	87	84	81												

