


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-75021N-LD9

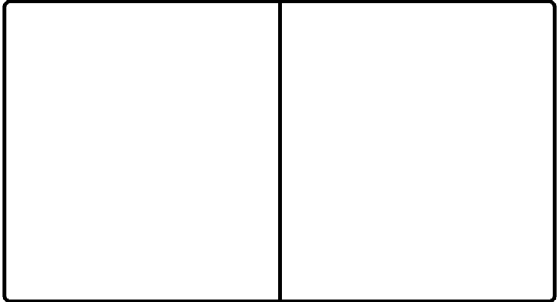

効 率	F ◡	0 %
	F ◒	100 %
	F ○	100 %
	器具光束	7630 lm

保守率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	591		
10°	578		
20°	551		
30°	501		
40°	365		
50°	123		
60°	34		
70°	2		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	固有照明率 (×0.01)																								
0.60	77	71	66	62	59	57	76	70	65	62	58	57	64	61	58	56	57	56	53	51					
0.80	90	82	79	74	72	69	88	81	78	74	72	69	76	73	71	69	70	68	65	64					
1.00	96	86	86	80	79	75	94	85	84	79	78	74	82	78	76	74	75	73	70	69					
1.25	103	91	93	85	86	81	100	90	91	84	85	80	88	83	83	79	81	79	76	74					
1.50	107	94	98	89	91	85	104	93	96	88	90	84	92	86	87	83	85	82	79	78					
2.00	113	98	105	94	99	91	110	97	103	93	98	90	99	92	94	89	91	88	85	84					
2.50	116	100	109	97	104	94	113	99	107	96	102	93	102	94	98	92	94	91	88	87					
3.00	118	102	113	99	108	96	115	100	110	98	105	95	104	96	101	94	97	92	90	89					
4.00	121	103	117	101	112	99	117	102	113	100	110	98	107	98	104	96	100	95	93	91					
5.00	123	104	119	102	115	100	119	103	116	101	112	100	109	99	107	98	101	96	95	93					
10.00	127	106	124	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	98	96					

