


東芝照明器具配光データシート

名 称	LEDダウンライト
形 名	LEDD-75033N-LD9

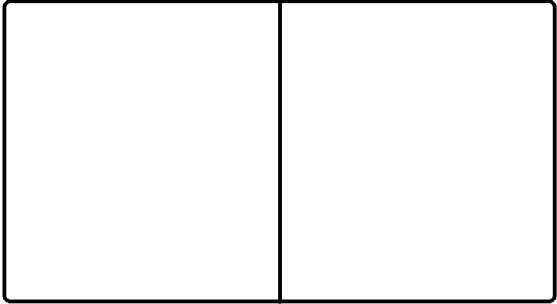

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	7720 lm

保 守 率	良	0.67
	中	0.63
	否	0.56

前 面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

備 考	
--------	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1003		
10°	950		
20°	744		
30°	464		
40°	249		
50°	86		
60°	13		
70°	2		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																								
0.60	86	79	76	72	70	67	84	78	75	71	69	67	74	71	69	67	68	67	64	63					
0.80	97	88	88	83	82	79	96	88	87	82	82	79	85	81	80	78	79	78	75	74					
1.00	102	91	93	86	87	82	100	90	92	86	86	82	89	85	84	81	83	81	78	77					
1.25	107	95	98	90	92	86	104	94	96	89	91	86	93	88	89	85	87	84	82	81					
1.50	110	97	102	93	96	89	107	96	100	92	95	89	97	91	92	88	90	87	85	83					
2.00	115	100	108	97	103	94	112	99	106	96	101	93	101	94	97	92	94	91	89	87					
2.50	118	102	112	99	107	96	114	100	109	98	104	95	104	96	101	94	97	93	91	90					
3.00	120	103	114	100	110	98	116	102	111	99	107	97	106	98	103	96	99	94	93	91					
4.00	123	104	118	102	114	100	119	103	115	101	111	100	109	99	106	98	101	97	95	93					
5.00	124	105	120	103	117	102	120	104	117	102	114	101	110	101	108	99	103	98	96	95					
10.00	128	107	126	106	124	105	123	106	122	105	120	104	114	103	113	102	106	100	99	97					

