


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-95023N-LD9

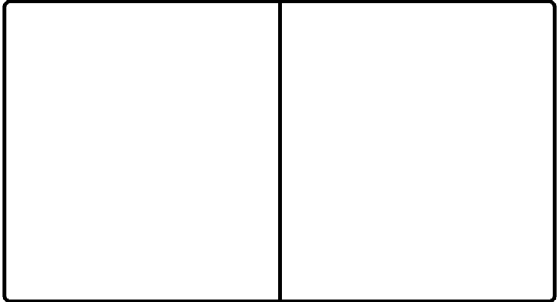

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	9420 lm

保守率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1036		
10°	981		
20°	777		
30°	489		
40°	258		
50°	46		
60°	7		
70°	2		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
室指数	固有照明率 (×0.01)																								
0.60	87	80	78	74	72	70	86	80	77	74	72	70	76	73	71	69	70	69	66	65					
0.80	99	90	90	85	84	81	97	89	89	84	84	81	87	83	83	80	82	80	78	77					
1.00	103	93	95	88	89	84	101	92	93	87	88	84	91	86	86	83	85	83	80	79					
1.25	108	96	99	91	94	88	105	95	98	91	92	87	95	89	90	87	88	86	84	82					
1.50	111	98	103	94	97	91	108	97	101	93	96	90	98	92	94	89	91	88	86	85					
2.00	116	100	109	97	104	95	112	99	107	96	102	94	102	95	99	93	95	92	90	89					
2.50	118	102	112	99	107	97	115	101	110	98	105	96	105	97	101	95	98	94	92	90					
3.00	120	103	115	101	110	99	116	102	112	100	108	98	107	98	104	96	99	95	93	92					
4.00	123	104	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	95	94					
5.00	124	105	121	104	118	102	120	104	117	103	114	101	111	101	109	100	103	98	97	95					
10.00	128	107	126	106	124	105	123	106	122	105	120	104	114	103	113	103	107	101	99	98					

