


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-95033N-LD9

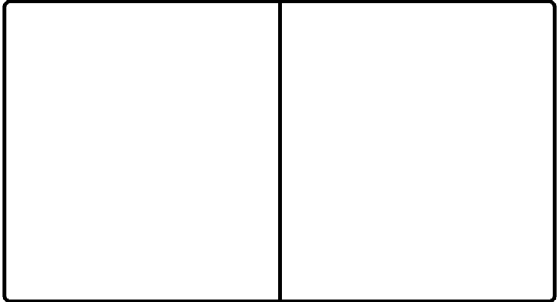

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	9550 lm

保守率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	966		
10°	920		
20°	737		
30°	469		
40°	253		
50°	90		
60°	14		
70°	2		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	固有照明率 (×0.01)																								
0.60	85	78	75	71	69	67	84	78	74	71	69	67	73	70	68	66	67	66	63	62					
0.80	97	88	88	82	82	78	95	87	87	82	81	78	85	81	80	78	79	77	75	74					
1.00	101	91	92	86	86	82	99	90	91	85	85	82	89	84	84	81	82	80	78	77					
1.25	106	94	98	90	92	86	104	93	96	89	91	86	93	88	88	85	87	84	82	80					
1.50	110	97	102	92	96	89	107	96	100	92	94	89	96	90	92	88	90	87	84	83					
2.00	115	100	108	96	102	94	112	99	106	96	101	93	101	94	97	92	94	91	89	87					
2.50	118	101	111	99	107	96	114	100	109	98	104	95	104	96	100	94	97	93	91	89					
3.00	120	103	114	100	110	98	116	102	111	99	107	97	106	97	103	96	99	94	93	91					
4.00	123	104	118	102	114	100	119	103	115	101	111	100	109	99	106	98	101	97	95	93					
5.00	124	105	120	103	117	102	120	104	117	102	114	101	110	101	108	99	103	98	96	95					
10.00	128	107	126	106	124	105	123	106	122	105	120	104	114	103	113	102	106	100	99	97					

