


東芝ランプ 配光データシート

名称	LED電球
形名	LDA7L-H
光束	500 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

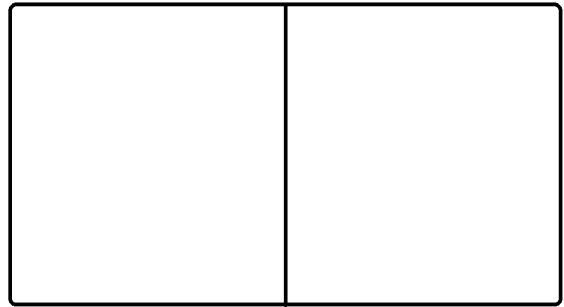

効率	F	%
	F	%
	F	100 %
	器具光束	500 lm

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
データは初期の標準値です。

θ	φ	光度 (cd/1000lm)		
		A-A	B-B	C-C
0°		268		
10°		265		
20°		255		
30°		238		
40°		213		
50°		180		
60°		142		
70°		102		
80°		68		
90°		42		
100°		25		
110°		15		
120°		9		
130°		5		
140°		3		
150°		1		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	照明率 (×0.01)																							
0.60	57	52	42	40	33	32	54	50	41	39	32	31	38	37	31	30	30	29	24	22				
0.80	67	61	52	49	42	40	64	59	51	48	41	40	48	45	40	38	38	37	32	29				
1.00	76	69	61	57	51	48	73	66	59	55	50	48	56	53	48	46	46	44	39	36				
1.25	84	74	69	63	59	55	80	72	67	62	58	54	63	59	55	52	52	51	45	42				
1.50	89	79	76	69	66	61	85	76	73	67	64	60	68	64	61	58	58	56	50	47				
2.00	98	85	86	76	76	69	93	82	82	75	74	68	77	71	70	66	66	63	58	55				
2.50	103	89	92	81	83	75	98	86	88	79	80	73	82	76	76	71	71	68	63	60				
3.00	106	91	97	85	89	79	102	89	93	83	86	78	86	79	80	75	75	72	67	64				
4.00	111	95	103	89	96	85	106	92	99	87	93	83	91	84	86	80	81	77	73	69				
5.00	114	97	107	92	101	88	109	94	103	90	97	86	95	86	90	83	84	80	76	73				
10.00	121	101	117	99	113	96	115	99	112	97	108	94	102	93	100	91	92	87	84	81				

