

# 東芝照明器具配光データシート

名称	LED街路灯
形名	LEDG-15801N (K)



保守率	良	0.78
	中	0.76
	否	0.72

光源	名称	LED
	形名	-
	光束	11650 lm × 1

効率	F $\frac{1}{2}$	0.0 %
	F $\frac{1}{4}$	100 %
	F $\bigcirc$	100 %
	器具光束	11650 lm

前面	透明強化ガラス
反射面	-

備考	
----	--

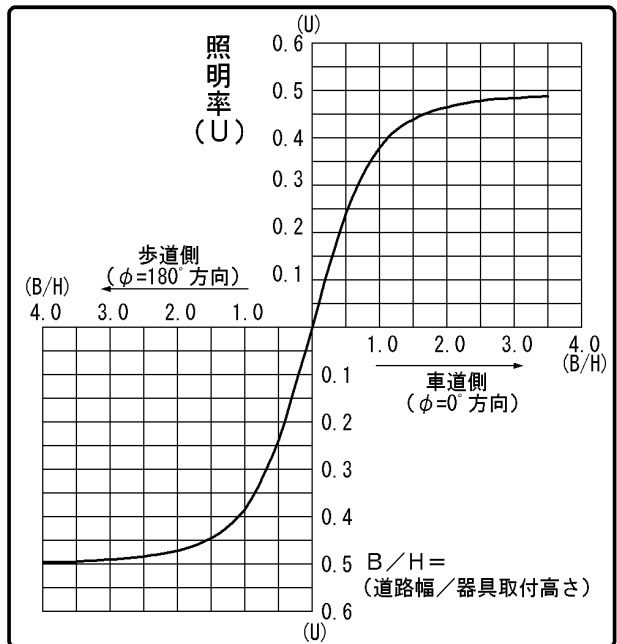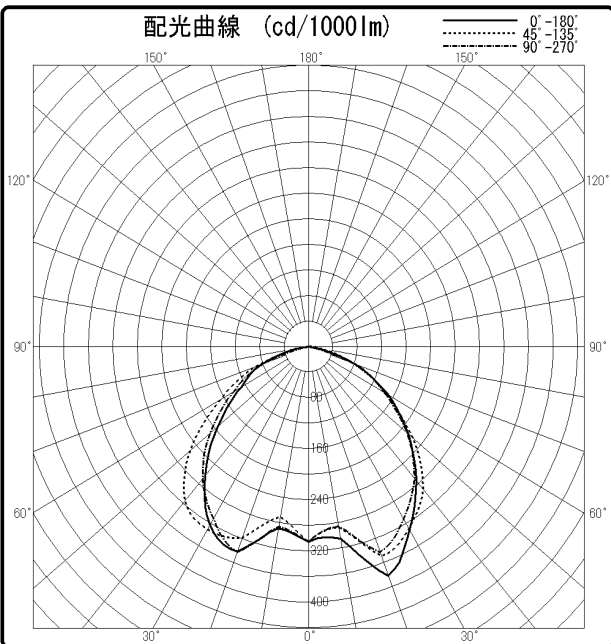

		光度 (cd/1000lm)				
θ \ φ	0°	45°	90°	135°	180°	
0°	305	305	305	305	305	
10°	305	287	286	271	289	
20°	381	349	342	319	341	
30°	330	329	311	331	323	
40°	275	291	270	315	263	
50°	214	222	211	252	194	
60°	150	141	141	167	126	
70°	83	85	78	94	81	
80°	18	24	7	17	20	
90°	0	0	0	0	0	
100°	0	0	0	0	0	
110°	0	0	0	0	0	
120°	0	0	0	0	0	
130°	0	0	0	0	0	
140°	0	0	0	0	0	
150°	0	0	0	0	0	
160°	0	0	0	0	0	
170°	0	0	0	0	0	
180°	0	0	0	0	0	

