


東芝照明器具配光データシート

名称	LEDベースライト
形名	LEDT-31008N-LJ9

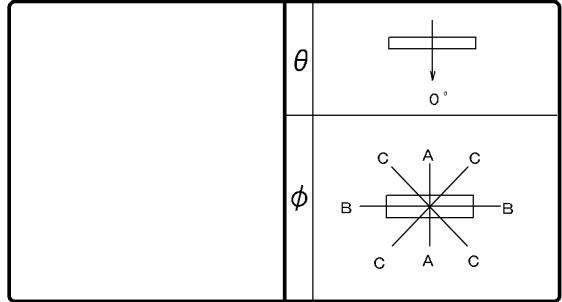

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	3190 lm

保守率	良	0.81
	中	0.81
	否	0.77

前面	カバー (フロスト)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考
この器具は初期照度補正機能付器具です。光束・照度は記載値の約0.81倍になります。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	320	320	320
10°	312	317	316
20°	297	302	303
30°	274	279	279
40°	236	245	244
50°	173	200	192
60°	96	140	118
70°	44	74	52
80°	14	25	17
90°	1	1	1
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	62	57	48	45	39	38	60	56	47	45	39	37	45	44	38	37	37	36	32	30
0.80	73	67	59	55	50	48	71	65	58	55	49	47	56	53	48	47	47	46	42	40
1.00	83	75	69	64	60	57	80	73	68	63	59	56	65	62	58	56	56	55	50	48
1.25	91	80	78	71	68	64	88	79	76	70	67	64	73	69	65	63	64	62	57	55
1.50	96	85	84	77	75	70	93	83	82	76	74	69	79	74	72	68	70	67	63	61
2.00	104	91	94	84	86	78	101	89	92	83	84	78	87	81	81	76	78	75	71	69
2.50	109	94	100	89	93	84	106	93	97	87	91	83	92	85	87	81	83	80	77	75
3.00	113	97	105	92	98	87	109	95	102	91	96	87	96	88	91	85	87	84	80	78
4.00	117	100	111	96	105	92	113	98	107	95	102	91	101	92	97	90	92	88	85	83
5.00	120	101	114	98	109	95	115	100	111	97	106	94	104	95	101	92	95	91	88	86
10.00	125	105	122	103	119	101	121	103	118	102	115	100	110	100	108	98	102	96	95	93

