


東芝照明器具配光データシート

名称	マルチカラーLEDシーリングライト (全光)
形名	LEDH82010YXLC-LT1

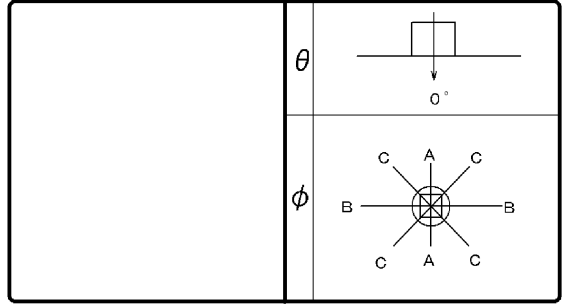

効 率	F	7 %
	F	93 %
	F	100 %
	器具光束	5000 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (透明)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	243	243	243
10°	238	238	238
20°	225	225	225
30°	203	203	203
40°	175	175	175
50°	141	141	141
60°	104	104	104
70°	65	65	65
80°	29	29	29
90°	5	5	5
100°	6	6	6
110°	7	7	7
120°	8	8	8
130°	9	9	9
140°	10	10	10
150°	10	10	10
160°	9	9	9
170°	9	9	9
180°	0	0	0

反射率 (%)	天井		80			70			50			30		20		0				
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	10	0				
室指数	固有照明率 (×0.01)																			
0.60	59	55	45	42	36	35	57	53	44	42	35	34	42	40	34	33	33	32	28	26
0.80	70	64	56	52	46	44	67	62	54	51	45	44	51	49	44	42	42	41	36	34
1.00	79	71	65	60	55	53	76	69	63	59	54	52	60	57	52	50	50	49	44	41
1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	60	57	57	55	51	48
1.50	93	81	80	72	70	65	89	79	77	71	69	64	73	68	66	63	63	61	56	53
2.00	101	88	90	80	81	74	96	85	87	78	79	73	81	75	75	70	71	68	64	61
2.50	106	91	96	85	88	79	101	89	92	83	85	78	86	80	81	75	76	73	69	66
3.00	109	94	101	88	93	83	105	91	97	86	90	82	90	83	85	79	80	77	73	70
4.00	114	97	107	92	101	88	109	95	103	91	97	87	95	87	91	84	85	81	78	75
5.00	117	99	111	95	105	92	112	97	106	93	102	90	99	90	95	87	89	84	81	78
10.00	123	103	119	101	116	99	117	101	114	99	112	97	105	95	103	94	96	91	88	85

