


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH80120YLC-LT2

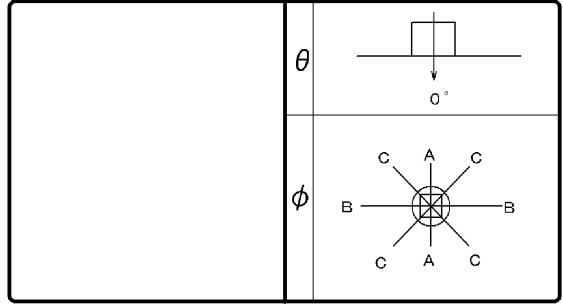

効 率	F	13%
	F	87%
	F	100%
	器具光束	2730 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	231	231	231
10°	227	227	227
20°	217	217	217
30°	199	199	199
40°	175	175	175
50°	146	146	146
60°	113	113	113
70°	81	81	81
80°	52	52	52
90°	32	32	32
100°	20	20	20
110°	15	15	15
120°	15	15	15
130°	16	16	16
140°	16	16	16
150°	15	15	15
160°	13	13	13
170°	12	12	12
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 ($\times 0.01$)																			
0.60	57	52	42	40	33	32	54	50	41	39	32	31	38	37	31	30	29	29	24	22
0.80	67	61	52	49	43	41	64	59	50	48	42	40	47	45	39	38	37	37	31	29
1.00	76	68	61	57	51	49	72	66	59	55	50	48	55	52	47	46	45	43	38	35
1.25	83	74	69	63	59	55	79	71	67	62	57	54	62	58	54	52	51	50	44	41
1.50	89	78	76	69	66	61	85	76	73	67	64	60	67	63	60	57	56	54	49	46
2.00	97	84	85	76	76	69	92	82	82	74	73	68	75	70	69	65	64	62	57	53
2.50	102	88	91	81	83	75	97	85	88	79	80	73	80	74	74	70	69	66	62	58
3.00	106	91	96	84	88	79	100	88	92	82	85	77	84	78	79	73	73	70	65	61
4.00	110	94	103	89	96	84	105	91	98	86	92	82	89	82	85	78	78	75	70	66
5.00	113	96	107	92	101	88	108	93	102	89	96	86	93	85	89	82	82	78	74	70
10.00	120	100	116	98	112	95	114	98	110	95	107	93	100	91	98	89	89	84	81	77

