


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81120YLC-LT2

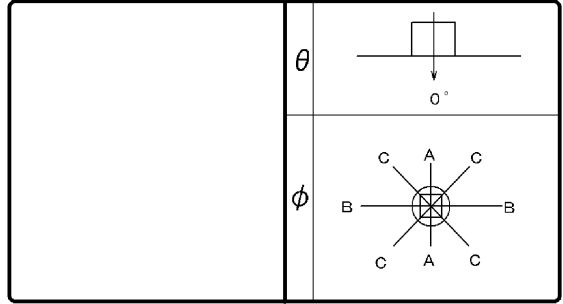

効 率	F	10%
	F	77%
	F	87%
器具 光束		3600 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	236	236	236
10°	232	232	232
20°	222	222	222
30°	204	204	204
40°	179	179	179
50°	149	149	149
60°	115	115	115
70°	82	82	82
80°	52	52	52
90°	31	31	31
100°	18	18	18
110°	13	13	13
120°	14	14	14
130°	14	14	14
140°	14	14	14
150°	14	14	14
160°	12	12	12
170°	11	11	11
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20		0					
	壁	70	50	30	70	50	30	50	30	50	30	30	10	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
室指数	固有照明率 ($\times 0.01$)																			
0.60	49	46	37	35	29	28	47	44	35	34	28	27	33	32	27	26	26	25	21	19
0.80	59	53	46	43	37	36	56	51	44	42	36	35	41	39	35	33	33	32	28	25
1.00	66	60	54	50	45	42	63	57	52	48	44	42	48	46	41	40	39	38	34	31
1.25	73	65	60	55	52	48	69	62	58	54	50	47	54	51	48	45	45	44	39	36
1.50	78	68	66	60	57	53	74	66	64	58	56	52	59	55	53	50	50	48	43	41
2.00	85	74	74	66	66	61	81	71	71	65	64	59	66	61	60	57	56	54	50	47
2.50	89	77	80	71	72	65	85	74	77	69	70	64	71	65	65	61	61	58	54	51
3.00	92	79	84	74	77	69	88	77	80	72	74	67	74	68	69	64	64	61	58	54
4.00	96	82	90	78	84	73	92	80	86	76	80	72	78	72	74	69	69	66	62	59
5.00	99	84	93	80	88	77	94	81	89	78	84	75	81	74	78	71	72	68	65	61
10.00	105	87	101	85	98	83	99	85	96	83	94	81	88	79	86	78	79	74	71	68

