


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH82120YLC-LT2

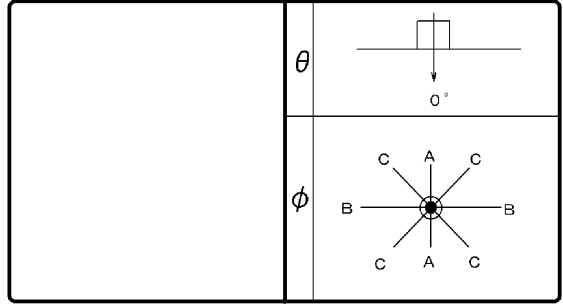

効 率	F	11 %
	F	89 %
	F	100 %
	器具光束	5200 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	241	241	241
10°	237	237	237
20°	226	226	226
30°	208	208	208
40°	183	183	183
50°	151	151	151
60°	116	116	116
70°	82	82	82
80°	52	52	52
90°	31	31	31
100°	18	18	18
110°	13	13	13
120°	13	13	13
130°	14	14	14
140°	14	14	14
150°	13	13	13
160°	12	12	12
170°	10	10	10
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	57	53	42	40	33	32	55	51	41	39	33	32	39	37	31	30	30	29	24	22
0.80	68	61	53	49	43	41	65	59	51	48	42	40	48	46	40	39	38	37	32	30
1.00	77	69	62	57	52	49	73	66	60	56	50	48	56	53	48	46	46	44	39	36
1.25	84	74	70	64	60	56	80	72	67	62	58	55	63	59	55	53	52	50	45	42
1.50	90	79	76	69	66	62	85	76	73	67	64	60	68	64	61	58	57	55	50	47
2.00	98	85	86	77	77	70	93	82	82	75	74	68	76	71	69	66	65	63	58	54
2.50	103	89	92	81	84	75	98	86	88	79	81	74	81	75	75	71	70	67	63	59
3.00	106	91	97	85	89	79	101	88	93	83	86	78	85	79	80	74	74	71	66	63
4.00	111	94	103	89	96	85	106	92	99	87	93	83	90	83	86	79	79	76	72	68
5.00	114	96	107	92	101	88	108	94	103	90	97	86	94	85	90	82	83	79	75	71
10.00	121	101	117	98	113	96	115	98	111	96	108	94	101	91	99	90	91	86	82	78

