


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81126PW-LD

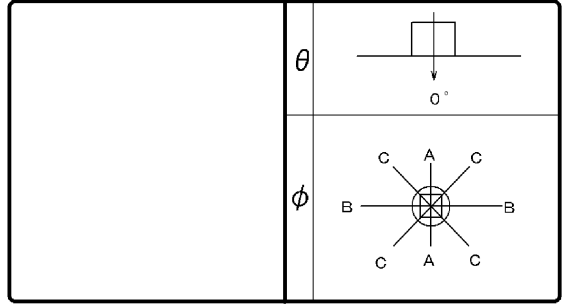

効 率	F	9 %
	F	91 %
	F	100 %
	器具 光束	3800 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	270	270	270
10°	264	264	264
20°	246	246	246
30°	219	219	219
40°	187	187	187
50°	151	151	151
60°	113	113	113
70°	77	77	77
80°	45	45	45
90°	24	24	24
100°	16	16	16
110°	12	12	12
120°	11	11	11
130°	9	9	9
140°	8	8	8
150°	7	7	7
160°	6	6	6
170°	4	4	4
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	30	10	0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数		固有照明率 (×0.01)																			
0.60		58	54	44	42	35	34	56	52	43	41	34	33	40	39	33	32	32	31	27	24
0.80		69	63	54	51	45	43	66	61	53	50	44	42	50	47	42	41	40	39	35	32
1.00		78	70	64	59	54	51	75	68	62	58	53	50	58	55	50	48	48	47	42	39
1.25		85	76	72	66	62	58	82	73	69	64	60	57	65	61	57	55	55	53	48	45
1.50		91	80	78	71	68	63	87	78	75	69	67	62	71	66	63	60	60	58	53	50
2.00		99	86	88	78	79	72	95	84	84	76	76	70	79	73	72	68	68	65	61	58
2.50		104	90	94	83	85	77	99	87	90	81	83	76	84	77	78	73	73	70	66	62
3.00		108	92	99	86	91	81	103	90	95	84	88	79	88	81	82	77	77	74	69	66
4.00		112	95	105	91	98	86	107	93	101	89	95	85	93	85	88	81	82	78	75	71
5.00		115	97	109	93	103	90	110	95	104	91	99	88	96	88	92	85	86	81	78	74
10.00		122	102	118	99	114	97	116	99	113	97	110	95	103	93	101	92	93	88	85	82

