


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-95013N-LD9

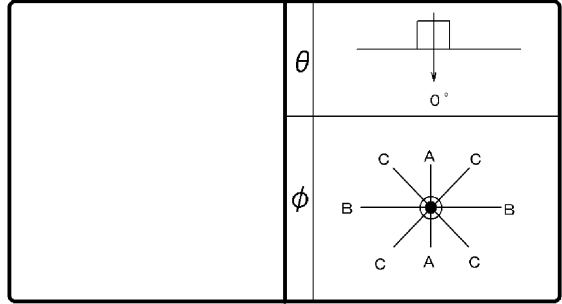

効 率	F	0 %
	F	100 %
	F	100 %
器具 光束		8900 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1111		
10°	1048		
20°	803		
30°	485		
40°	225		
50°	38		
60°	11		
70°	5		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数		固有照明率 (×0.01)																			
	0.60	89	82	79	75	74	71	87	81	79	75	73	71	77	74	72	71	72	70	68	67
	0.80	100	91	91	86	86	82	98	90	90	85	85	82	88	84	84	82	83	81	79	78
	1.00	104	93	95	88	90	85	102	92	94	88	89	85	92	87	87	84	86	84	81	80
	1.25	108	96	100	92	94	88	106	95	98	91	93	88	95	90	91	87	89	86	84	83
	1.50	111	98	103	94	98	91	108	97	102	93	97	90	98	92	94	90	92	89	87	85
	2.00	116	101	109	97	104	95	112	100	107	97	102	94	102	95	99	93	96	92	90	89
	2.50	118	102	112	99	108	97	115	101	110	98	105	96	105	97	101	95	98	94	92	91
	3.00	120	103	115	101	110	99	117	102	112	100	108	98	107	98	104	96	99	95	93	92
	4.00	123	104	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	96	94
	5.00	124	105	121	104	118	102	120	104	117	103	115	102	111	101	109	100	103	98	97	95
	10.00	128	107	126	106	124	106	123	106	122	105	120	105	114	103	113	103	107	101	100	98

