


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-21027NY-LD9

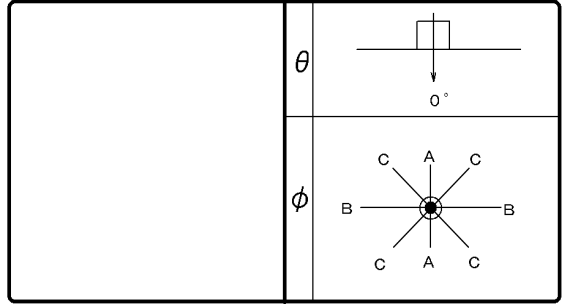

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	1930 lm

保守率	良	0.77
	中	0.73
	否	0.64

前面	下面開放
反射面	白色

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	469		
10°	459		
20°	431		
30°	382		
40°	312		
50°	226		
60°	102		
70°	20		
80°	6		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	固有照明率 (×0.01)																																				
0.60	69	64	56	54	49	47	68	63	56	53	48	47	54	52	48	46	47	46	42	41																	
0.80	83	75	70	66	62	59	80	74	69	65	61	59	67	64	60	58	59	58	54	52																	
1.00	89	80	77	72	69	66	87	79	76	71	69	65	74	70	67	65	66	64	60	58																	
1.25	97	86	86	78	78	73	94	85	84	78	77	72	81	76	75	71	73	71	67	65																	
1.50	102	89	91	83	83	77	99	88	89	82	82	77	86	80	80	76	77	75	71	70																	
2.00	109	95	100	89	93	85	106	93	98	89	91	84	93	87	88	83	85	82	79	77																	
2.50	113	97	105	93	99	89	109	96	102	92	97	88	97	90	93	87	89	86	83	81																	
3.00	116	99	109	96	103	92	112	98	106	95	101	91	101	93	97	90	93	88	86	84																	
4.00	120	102	114	99	109	96	116	100	111	98	106	95	105	96	101	94	97	92	90	88																	
5.00	122	103	117	101	113	98	118	102	113	99	110	97	107	97	104	96	99	94	92	90																	
10.00	126	106	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	95																	

