


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-09027NY-LD9

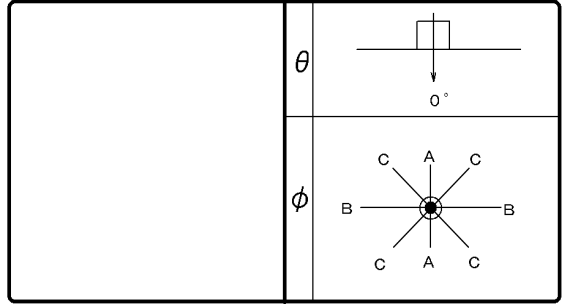

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	1120 lm

保守率	良	0.77
	中	0.73
	否	0.64

前面	下面開放
反射面	白色

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	457		
10°	449		
20°	423		
30°	378		
40°	315		
50°	233		
60°	101		
70°	20		
80°	5		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0					
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30						
室指数	固有照明率 (×0.01)																																				
0.60	69	64	56	53	48	47	67	63	55	53	48	47	54	52	47	46	47	46	42	40																	
0.80	82	75	70	65	62	59	80	74	69	65	61	59	67	64	60	58	59	58	54	52																	
1.00	89	80	77	72	69	66	87	79	76	71	68	65	73	70	67	64	65	64	60	58																	
1.25	97	86	86	78	77	73	94	85	84	78	76	72	81	76	74	71	73	70	67	65																	
1.50	102	89	91	83	83	77	99	88	89	82	82	77	86	80	80	76	77	75	71	70																	
2.00	109	95	100	90	93	85	106	94	98	89	91	84	93	87	88	83	85	82	79	77																	
2.50	113	98	105	93	99	89	109	96	103	92	97	88	98	90	93	87	89	86	83	81																	
3.00	116	100	109	96	103	92	112	98	106	95	101	91	101	93	97	90	93	89	86	84																	
4.00	120	102	114	99	109	96	116	101	111	98	107	95	105	96	101	94	97	92	90	88																	
5.00	122	103	117	101	113	98	118	102	114	100	110	97	107	98	104	96	99	94	92	90																	
10.00	126	106	124	104	121	103	122	104	120	103	117	102	112	101	101	100	104	98	97	95																	

