


東芝ランプ 配光データシート

名称	東芝電球形LEDランプ
形名	LDT532N-G
光束	4200 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

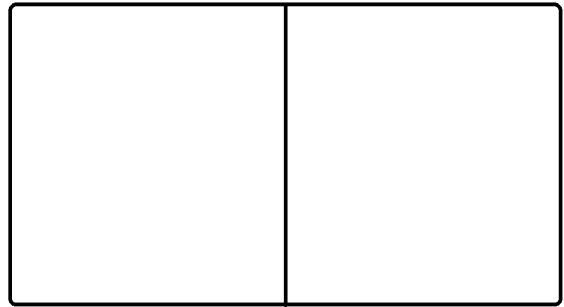

効率	F	%
	F	%
	F	100 %
	器具光束	4200 lm

最大取付間隔	
A-A	4.8 H
B-B	4.8 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		12	
10°		17	
20°		32	
30°		48	
40°		66	
50°		82	
60°		96	
70°		106	
80°		111	
90°		112	
100°		110	
110°		103	
120°		91	
130°		76	
140°		59	
150°		41	
160°		23	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																								
0.60	49	45	33	31	24	23	44	41	30	29	22	21	24	23	17	17	13	13	8	3					
0.80	58	52	42	39	31	30	52	48	38	36	28	27	30	29	23	22	18	17	11	6					
1.00	66	59	49	46	38	36	59	54	45	42	35	33	36	34	28	27	22	22	15	9					
1.25	73	64	57	52	45	42	65	59	51	47	41	39	42	39	34	32	26	26	18	12					
1.50	78	69	63	57	51	48	70	63	57	52	47	44	46	43	38	36	30	29	22	14					
2.00	86	75	72	64	61	56	78	69	65	59	56	51	53	49	45	43	36	35	27	19					
2.50	92	79	79	70	68	61	82	72	71	64	62	57	58	53	51	47	40	39	31	22					
3.00	96	82	84	73	74	66	86	75	76	68	67	61	61	57	55	51	44	42	34	25					
4.00	101	86	91	79	82	72	91	79	82	73	75	67	67	61	61	56	49	46	38	28					
5.00	105	88	96	82	88	76	94	82	87	76	80	71	70	64	65	60	52	49	42	31					
10.00	112	94	107	90	102	86	102	87	97	84	92	80	79	71	75	68	61	57	50	39					

