


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-05011L-LS1

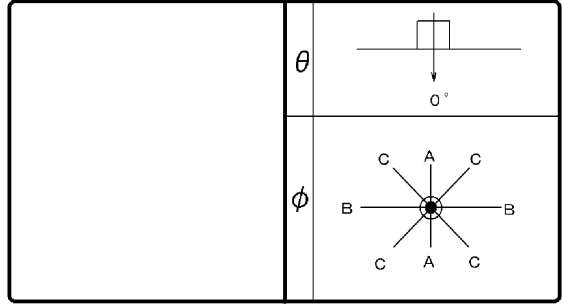

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	395 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	白

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	539		
10°	523		
20°	477		
30°	415		
40°	321		
50°	176		
60°	69		
70°	31		
80°	12		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80				70				50				30		20	0			
	壁	70	50	30	70	50	30	50	30	50	30	30	10	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数	固有照明率 (×0.01)																			
0.60	72	67	60	57	52	51	71	66	59	56	52	51	58	55	51	50	51	50	46	45
0.80	85	77	73	69	65	63	83	76	72	68	65	62	70	67	64	62	63	61	58	56
1.00	92	82	80	74	72	69	89	81	79	74	71	68	76	72	70	67	68	67	63	62
1.25	98	87	88	80	80	75	96	86	86	79	79	74	83	78	77	74	75	73	69	68
1.50	103	91	93	84	85	79	100	89	91	83	84	79	87	82	82	78	79	77	73	72
2.00	110	96	101	90	94	86	107	94	99	89	93	86	94	88	89	84	86	83	80	79
2.50	114	98	106	94	100	90	110	97	103	93	98	89	98	91	94	88	90	87	84	82
3.00	116	100	110	96	104	93	113	98	107	95	102	92	101	93	97	91	93	89	87	85
4.00	120	102	114	99	110	96	116	101	111	98	107	96	105	96	102	94	97	92	90	88
5.00	122	103	117	101	113	99	118	102	114	100	110	98	107	98	104	96	99	94	92	90
10.00	126	106	124	104	121	103	122	104	120	103	117	102	112	101	110	100	104	98	97	95

