


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-03011L-LS1

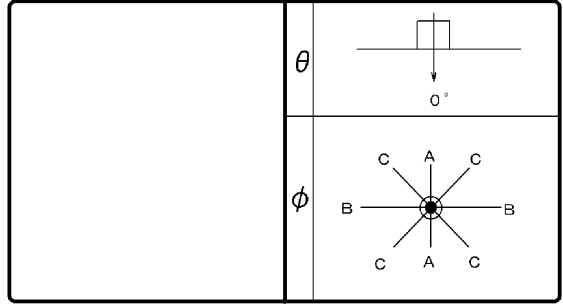

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	250 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	白

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	540		
10°	522		
20°	477		
30°	415		
40°	322		
50°	175		
60°	69		
70°	31		
80°	12		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0		
室指数	固有照明率 (×0.01)																								
0.60	72	66	60	57	52	51	71	65	59	56	52	50	58	55	51	50	51	50	46	44					
0.80	85	77	73	68	65	63	83	76	72	68	65	62	70	67	64	62	63	61	58	56					
1.00	91	82	80	74	72	68	89	81	79	73	71	68	76	72	70	67	68	67	63	61					
1.25	98	87	87	80	80	75	96	86	86	79	79	74	83	78	77	73	75	73	69	67					
1.50	103	90	93	84	85	79	100	89	91	83	84	79	87	82	81	78	79	77	73	72					
2.00	110	95	101	90	94	86	106	94	99	89	92	85	94	88	89	84	86	83	80	78					
2.50	113	98	106	93	100	90	110	96	103	92	97	89	98	91	94	88	90	86	84	82					
3.00	116	100	109	96	104	93	112	98	106	95	101	92	101	93	97	90	93	89	86	85					
4.00	120	102	114	99	109	96	116	100	111	98	107	95	105	96	101	94	97	92	90	88					
5.00	122	103	117	101	113	98	118	102	114	99	110	97	107	97	104	96	99	94	92	90					
10.00	126	105	124	104	121	103	122	104	119	103	117	102	112	101	110	100	104	98	96	94					

