


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-03011BN-LS1

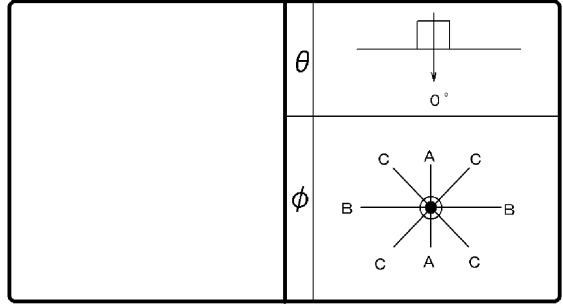

効 率	F $\frac{1}{2}$	0 %
	F $\frac{1}{4}$	100 %
	F $\frac{1}{8}$	100 %
	器具光束	270 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	バツフル白

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	665		
10°	644		
20°	591		
30°	478		
40°	234		
50°	117		
60°	71		
70°	37		
80°	13		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室指数	固有照明率 (×0.01)																																				
0.60	77	71	65	62	58	57	75	70	65	62	58	56	63	61	57	56	57	56	52	51																	
0.80	89	81	78	73	71	68	87	80	77	73	70	68	75	72	69	67	68	67	63	62																	
1.00	95	85	84	78	77	73	92	84	83	77	76	72	80	76	74	72	73	71	68	66																	
1.25	101	89	90	83	83	78	98	88	89	82	82	77	86	81	80	77	78	76	73	71																	
1.50	105	92	95	86	88	82	102	91	93	85	87	81	90	84	84	80	82	79	76	75																	
2.00	111	96	103	92	96	88	108	95	100	91	94	87	96	89	91	86	88	85	82	80																	
2.50	114	99	107	95	101	91	111	97	104	94	99	90	99	92	95	89	92	88	85	84																	
3.00	117	100	110	97	105	94	113	99	108	96	103	93	102	94	98	91	94	90	88	86																	
4.00	120	102	115	100	111	97	116	101	112	99	108	96	106	97	102	95	98	93	91	89																	
5.00	123	104	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91																	
10.00	127	106	124	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	97	95																	

