


# 東芝照明器具配光データシート

名 称	LEDダウンライト
形 名	LEDD-03011BL-LS1

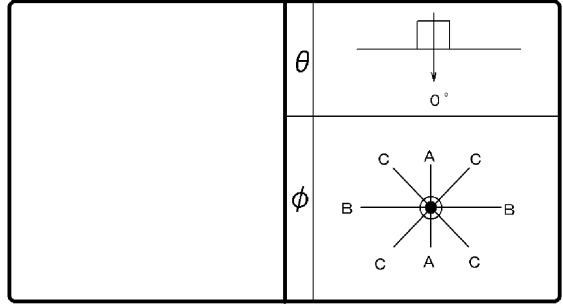

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	210 lm

保 守 率	良	0.76
	中	0.72
	否	0.64

前 面	下面開放
反射面	バツフル白

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備  
考

θ \ φ	A-A	B-B	C-C
0°	660		
10°	640		
20°	588		
30°	476		
40°	232		
50°	116		
60°	71		
70°	37		
80°	13		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反 射 率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	10	0	0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	10	0						
	室指数	固有照明率 (×0.01)																			
	0.60	77	71	65	62	58	57	75	70	65	62	58	56	63	61	57	56	57	55	52	51
	0.80	89	81	78	73	71	68	87	80	77	72	70	67	75	71	69	67	68	66	63	62
	1.00	94	85	84	78	76	72	92	84	82	77	76	72	80	76	74	71	73	71	68	66
	1.25	100	89	90	83	83	78	98	88	88	82	82	77	85	80	80	76	78	76	72	71
	1.50	104	92	95	86	88	81	101	91	93	85	86	81	89	84	84	80	82	79	76	74
	2.00	111	96	102	91	96	87	107	95	100	91	94	87	96	89	91	86	88	85	82	80
	2.50	114	98	107	94	101	91	111	97	104	93	99	90	99	92	95	89	91	88	85	83
	3.00	117	100	110	97	105	93	113	99	107	96	102	93	102	94	98	91	94	90	87	86
	4.00	120	102	115	99	110	97	116	101	112	98	107	96	105	96	102	94	98	93	91	89
	5.00	122	103	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91
	10.00	127	106	124	105	122	104	122	105	120	104	118	103	112	101	111	101	104	99	97	95

