


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-05021BN-LS1

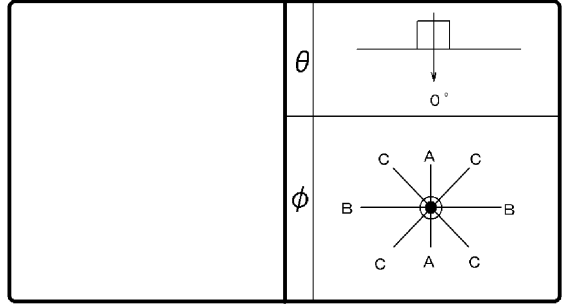

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	485 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	バツフル白

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	586		
10°	571		
20°	531		
30°	471		
40°	343		
50°	110		
60°	54		
70°	26		
80°	10		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	固有照明率 (×0.01)																								
0.60	76	70	64	61	57	55	74	69	63	60	56	55	62	59	56	54	55	54	50	49					
0.80	88	80	77	72	70	67	86	79	76	72	69	67	74	71	68	66	67	66	62	61					
1.00	94	85	83	77	76	72	92	83	82	77	75	72	80	75	74	71	72	70	67	66					
1.25	101	89	90	83	83	78	98	88	89	82	82	78	86	81	80	77	78	76	73	71					
1.50	105	92	95	86	88	82	102	91	93	86	87	81	90	84	85	80	82	80	77	75					
2.00	111	97	103	92	97	88	108	96	101	91	95	88	96	90	92	86	89	85	83	81					
2.50	115	99	108	95	102	92	111	98	105	94	100	91	100	92	96	90	92	88	86	84					
3.00	117	101	111	97	106	94	114	99	108	96	103	93	102	94	99	92	95	91	88	87					
4.00	121	103	115	100	111	97	117	101	112	99	108	97	106	97	103	95	98	93	91	90					
5.00	123	104	118	101	114	99	118	102	115	100	111	98	108	98	105	97	100	95	93	91					
10.00	127	106	124	105	122	103	122	105	120	104	118	102	112	101	111	100	104	99	97	95					

