


# 東芝ランプ 配光データシート

名称	LEDライトエンジン
形名	LECF/10L-W9 -GH2785
光束	940 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

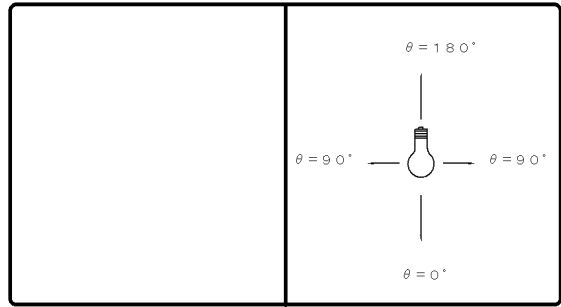

効率	F	%
	F	%
	F	100 %
	器具光束	940 lm

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	503		
10°	499		
20°	455		
30°	369		
40°	249		
50°	149		
60°	106		
70°	64		
80°	30		
90°	6		
100°	5		
110°	5		
120°	3		
130°	3		
140°	2		
150°	1		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0																
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10													
室指数	照明率 (×0.01)																																															
0.60	70	64	57	54	49	48	68	63	56	53	49	47	54	52	48	47	47	46	42	41																												
0.80	82	74	69	65	61	59	80	73	68	64	60	58	66	63	59	57	58	57	53	51																												
1.00	88	79	76	70	67	64	86	78	74	70	67	64	72	68	65	63	63	62	58	56																												
1.25	95	84	83	76	75	70	92	83	81	75	74	70	78	73	71	68	69	67	63	61																												
1.50	99	88	88	80	80	75	96	86	86	79	79	74	82	77	76	73	74	71	68	66																												
2.00	107	93	97	87	90	82	103	91	95	86	88	81	90	83	84	79	81	78	74	72																												
2.50	111	96	102	90	95	86	107	94	99	89	93	85	94	87	89	83	85	82	78	76																												
3.00	114	98	106	93	100	89	110	96	103	92	97	88	97	89	93	86	88	85	82	79																												
4.00	118	100	112	97	106	93	114	99	108	95	103	92	102	93	98	90	93	88	86	83																												
5.00	120	102	115	99	110	96	116	100	111	98	107	95	104	95	101	93	96	91	88	86																												
10.00	126	105	123	103	120	102	121	103	118	102	116	101	110	99	108	98	102	96	94	92																												

