


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-05313N-LS1

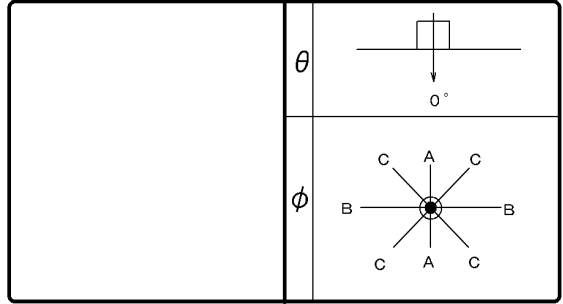

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	480 lm

保守 率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	アルミ蒸着処理

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1519		
10°	1423		
20°	823		
30°	468		
40°	154		
50°	28		
60°	0		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	94	86	86	81	80	78	93	86	85	81	80	78	84	80	79	78	79	77	75	74
0.80	104	95	97	91	92	88	103	94	96	90	91	88	94	90	90	88	89	87	85	85
1.00	107	96	100	93	95	90	105	96	98	92	94	90	96	91	92	89	91	88	87	86
1.25	111	98	103	95	98	92	108	97	102	94	97	91	99	93	95	91	93	90	88	87
1.50	113	100	106	96	101	94	110	99	104	96	100	93	101	95	97	93	95	92	90	89
2.00	117	102	111	99	106	97	114	101	108	98	104	96	104	97	101	95	98	94	92	91
2.50	119	103	114	101	109	98	116	102	111	100	107	98	106	98	103	97	99	95	94	92
3.00	121	104	116	102	112	100	117	103	113	101	110	99	108	99	105	98	101	97	95	93
4.00	124	105	120	104	116	102	120	104	116	103	113	101	110	101	108	100	103	98	97	95
5.00	125	106	122	105	119	103	121	105	118	104	116	103	112	102	101	101	105	99	98	96
10.00	129	107	127	107	126	107	124	106	123	106	122	106	115	104	114	104	108	102	101	99

