


東芝照明器具配光データシート

名称	LEDペンダント
形名	LEDP84021-LC

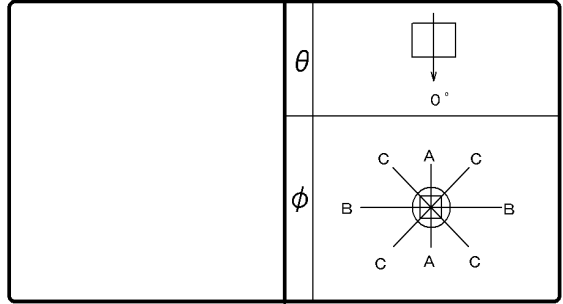

効 率	F	5 %
	F	95 %
	F	100 %
	器具 光束	4270 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1215	1215	1215
10°	1189	1189	1189
20°	1116	1116	1116
30°	1003	1003	1003
40°	857	857	857
50°	689	689	689
60°	507	507	507
70°	325	325	325
80°	170	170	170
90°	69	69	69
100°	25	25	25
110°	20	20	20
120°	22	22	22
130°	24	24	24
140°	26	26	26
150°	26	26	26
160°	25	25	25
170°	21	21	21
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数		固有照明率 (×0.01)																		
0.60	62	57	48	45	39	38	60	55	47	44	39	37	45	43	38	37	37	36	31	29
0.80	74	67	60	56	50	48	71	65	58	55	50	48	56	53	48	47	47	46	41	39
1.00	81	73	67	62	58	55	78	71	65	61	57	54	62	59	55	53	53	51	47	44
1.25	89	79	75	69	66	62	85	77	73	68	64	61	69	65	62	59	60	58	53	51
1.50	93	82	81	73	72	67	90	80	79	72	70	66	74	70	67	64	64	62	58	55
2.00	102	88	91	81	82	75	98	86	88	80	80	74	83	77	76	72	73	70	66	63
2.50	106	92	97	85	89	80	102	90	93	84	86	79	87	81	82	77	78	74	70	68
3.00	110	94	101	89	94	84	105	92	98	87	91	82	91	84	86	80	81	78	74	71
4.00	114	97	107	93	101	89	110	95	103	91	98	88	96	88	92	85	87	83	79	76
5.00	117	99	111	95	106	92	112	97	107	94	102	91	99	91	96	88	90	85	82	79
10.00	123	103	120	101	117	99	118	101	115	99	112	97	106	96	104	95	97	92	89	86

