


東芝照明器具配光データシート

名称	ユニバーサルダウンライト
形名	LEDD-10101L-LD9

保守率	良	0.90
	中	0.86
	否	0.76

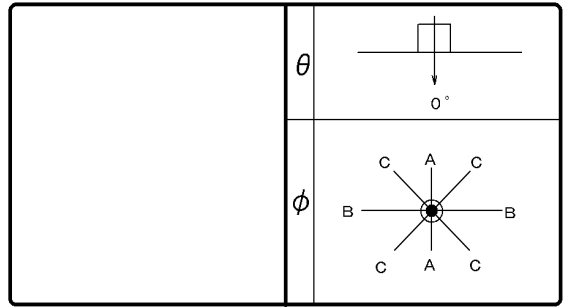

光源	名称	LED
	形名	LED
	光束	1600 lm × 1

効率	F	0%
	F	100%
	F	100%
	器具光束	1600 lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考

前面
反射面

光度 (cd/1000lm)			
0°	8612	25°	117
1°		30°	58
2°		35°	38
3°		40°	28
4°		45°	22
5°	6214	50°	18
6°		55°	15
7°		60°	11
8°		65°	8
9°		70°	6
10°	3048	75°	3
11°		80°	1
12°		85°	0
13°		90°	0
14°			
15°	1223		
16°			
17°			
18°			
19°			
20°	347		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	50	30	50	30	50	30	50	30	30	10	0	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数		照明率 (×0.01)																							
0.60		98	90	90	86	85	83	96	89	89	85	85	83	88	85	84	82	84	82	80	80				
0.80		104	94	96	90	91	87	102	93	95	90	91	87	93	89	89	87	88	86	85	84				
1.00		108	97	100	93	95	90	106	96	99	93	94	90	97	92	93	89	91	89	87	86				
1.25		110	98	103	94	97	91	108	97	101	94	96	91	98	93	94	90	92	90	88	87				
1.50		112	99	105	95	99	92	109	98	103	94	98	92	99	93	95	91	93	90	88	87				
2.00		115	100	108	97	103	94	112	99	106	96	101	94	102	95	98	93	95	91	89	88				
2.50		118	102	112	99	107	96	114	101	109	98	105	96	104	96	101	94	97	93	91	90				
3.00		120	103	115	100	110	98	116	102	112	100	108	98	106	98	103	96	99	95	93	92				
4.00		123	105	119	103	116	102	119	104	116	102	113	101	110	100	107	99	103	98	96	95				
5.00		126	106	122	105	120	104	121	105	119	104	116	103	112	102	111	102	105	100	99	97				
10.00		130	109	130	109	129	110	126	108	125	108	125	109	118	107	118	107	111	105	104	103				

