


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH80128W-LD

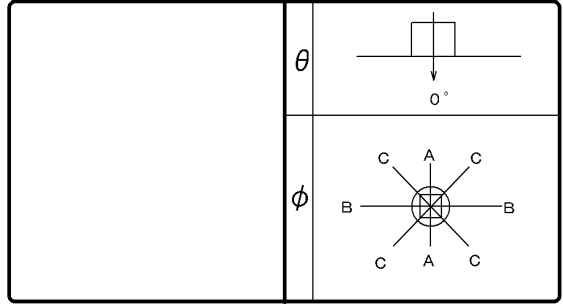

効 率	F	9 %
	F	91 %
	F	100 %
	器具 光束	3200 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	318	318	318
10°	311	311	311
20°	290	290	290
30°	258	258	258
40°	220	220	220
50°	178	178	178
60°	133	133	133
70°	91	91	91
80°	53	53	53
90°	28	28	28
100°	19	19	19
110°	14	14	14
120°	13	13	13
130°	11	11	11
140°	9	9	9
150°	8	8	8
160°	7	7	7
170°	5	5	5
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	61	56	47	44	38	37	58	54	45	43	37	36	43	41	36	35	35	34	30	28
0.80	72	66	58	55	49	47	70	64	57	53	48	46	54	51	46	45	44	43	39	36
1.00	79	71	65	61	56	53	76	69	63	59	55	52	60	57	52	51	50	49	44	41
1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	59	57	57	55	50	47
1.50	92	81	79	72	70	65	88	79	76	70	68	64	72	67	65	61	61	59	55	52
2.00	100	87	89	79	80	73	96	85	86	78	78	72	80	74	73	69	69	67	62	59
2.50	105	90	95	84	86	78	100	88	91	82	84	76	85	78	79	74	74	71	67	64
3.00	108	93	99	87	92	82	103	90	95	85	89	80	88	81	83	77	78	75	70	67
4.00	113	96	105	91	99	87	108	93	101	89	95	85	93	85	89	82	83	79	75	72
5.00	116	98	109	94	104	90	110	95	105	92	100	88	96	88	93	85	86	82	78	75
10.00	122	102	118	100	115	97	116	99	113	97	110	96	103	93	101	92	94	88	85	82

