


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF5N-H-GX5 3/3
光束	450 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

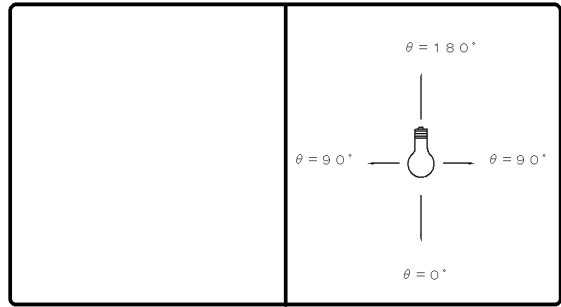

効率	F	%
	F	%
	F	100 %
	器具光束	450 lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	354		
10°	347		
20°	324		
30°	288		
40°	239		
50°	186		
60°	133		
70°	84		
80°	41		
90°	16		
100°	13		
110°	12		
120°	10		
130°	8		
140°	6		
150°	4		
160°	2		
170°	0		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70		50		70		50		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数	照明率 (×0.01)																			
0.60	63	58	49	46	40	39	61	56	48	46	40	39	46	44	39	38	38	37	33	31
0.80	75	68	61	57	52	50	72	66	59	56	51	49	57	54	49	48	48	47	42	40
1.00	82	73	68	63	59	56	79	72	66	62	58	55	63	60	56	54	54	53	48	46
1.25	89	79	76	70	67	63	86	77	74	69	66	62	70	66	63	60	61	59	54	52
1.50	94	83	82	74	73	68	91	81	80	73	71	67	75	70	68	65	65	63	59	56
2.00	102	89	92	82	83	76	98	87	89	80	81	75	83	77	77	73	73	71	66	64
2.50	107	92	97	86	90	81	103	90	94	84	87	80	88	81	82	77	78	75	71	68
3.00	110	95	102	89	95	84	106	93	98	88	92	83	92	84	87	81	82	78	75	72
4.00	115	98	108	93	102	90	110	96	104	92	99	88	97	88	92	85	87	83	79	77
5.00	118	99	112	96	106	93	113	97	107	94	103	91	100	91	96	88	90	86	82	79
10.00	123	103	120	101	117	99	118	101	115	99	112	98	106	96	104	95	97	92	89	86

