


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF7N-W-GX5 3/3
光束	560 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

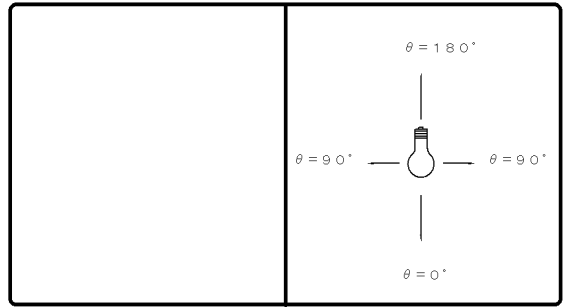

効率	F	%
	F	%
	F	100 %
	器具光束	560 lm

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1259		
10°	1033		
20°	675		
30°	372		
40°	190		
50°	89		
60°	52		
70°	33		
80°	21		
90°	8		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		10		0		0		0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10			
室指数	照明率 (×0.01)																																				
0.60	77	71	65	62	58	56	75	70	64	61	57	56	63	60	57	55	56	55	51	50																	
0.80	86	78	75	70	67	65	84	77	74	70	67	64	72	68	66	64	65	63	60	58																	
1.00	94	85	83	77	76	72	92	84	82	76	75	71	79	75	73	71	72	70	66	65																	
1.25	100	89	89	82	82	77	97	88	88	81	81	76	85	80	79	75	77	75	71	70																	
1.50	104	92	94	86	87	81	101	91	92	85	86	80	89	83	83	79	81	78	75	73																	
2.00	110	96	102	91	95	86	107	95	99	90	93	86	95	88	90	85	87	83	80	79																	
2.50	114	98	106	94	100	90	110	97	104	93	98	89	98	91	94	88	90	87	84	82																	
3.00	117	100	110	96	104	93	113	99	107	95	102	92	101	93	97	90	93	89	86	85																	
4.00	120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	92	90	88																	
5.00	123	104	118	101	114	99	118	102	114	100	111	98	107	98	105	96	99	94	92	90																	
10.00	127	107	125	105	123	104	123	105	121	104	119	103	113	102	111	101	105	99	98	96																	

