


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF8N-W-GX5 3/3
光束	770 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

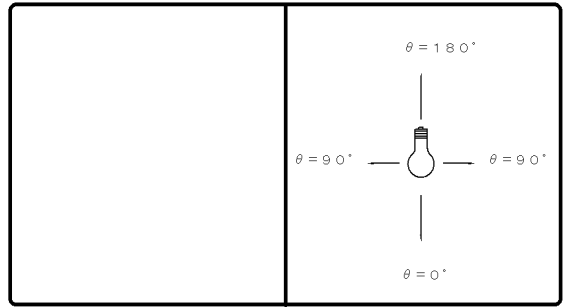

効率	F		%
	F		%
	F	100	%
	器具光束	770	lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1239		
10°	924		
20°	610		
30°	387		
40°	204		
50°	102		
60°	59		
70°	38		
80°	24		
90°	8		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	照明率 (×0.01)																							
0.60	75	69	62	59	55	53	73	68	62	59	55	53	60	58	54	53	53	52	49	47				
0.80	85	77	73	68	65	62	83	76	72	67	64	62	70	66	63	61	62	61	57	56				
1.00	93	83	81	75	73	70	90	82	80	75	73	69	77	73	71	68	69	68	64	63				
1.25	99	88	88	80	80	75	96	86	86	80	79	75	83	78	77	74	75	73	69	68				
1.50	103	91	93	84	85	79	100	89	91	83	84	79	87	82	82	78	79	77	73	72				
2.00	109	95	100	90	93	85	106	94	98	89	92	85	93	87	88	83	85	82	79	77				
2.50	113	98	105	93	99	89	110	96	102	92	97	88	97	90	93	87	89	85	83	81				
3.00	116	99	109	95	103	92	112	98	106	94	101	91	100	92	96	90	92	88	85	83				
4.00	120	102	114	99	109	96	116	100	110	97	106	95	104	95	101	93	96	91	89	87				
5.00	122	103	117	101	113	98	118	102	113	99	110	97	107	97	104	95	99	94	91	90				
10.00	127	106	124	105	122	104	122	105	120	104	118	103	121	101	111	100	104	98	97	95				

