


東芝照明器具配光データシート

名称	LEDペンダント
形名	LEDP81003PL-LD

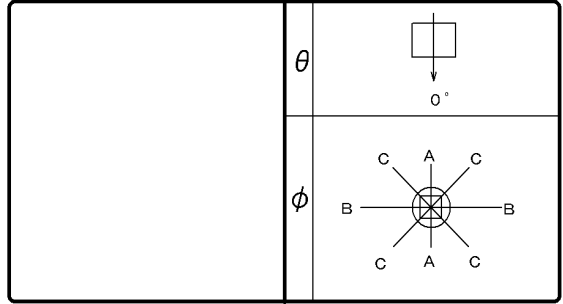

効 率	F ◡	10 %
	F ◒	90 %
	F ○	100 %
	器具 光束	3900 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	346	346	346
10°	338	338	338
20°	312	312	312
30°	273	273	273
40°	225	225	225
50°	174	174	174
60°	124	124	124
70°	78	78	78
80°	40	40	40
90°	15	15	15
100°	16	16	16
110°	17	17	17
120°	17	17	17
130°	16	16	16
140°	15	15	15
150°	14	14	14
160°	12	12	12
170°	9	9	9
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	62	57	48	46	40	39	60	56	47	45	39	38	45	43	38	37	37	36	32	30
0.80	74	67	60	57	51	49	71	65	59	55	50	49	56	53	48	47	47	46	41	39
1.00	81	73	67	63	58	55	78	71	65	61	57	54	62	59	55	53	52	51	46	44
1.25	88	78	75	69	66	62	85	76	73	68	65	61	69	65	62	59	59	57	52	50
1.50	93	82	81	74	72	67	89	80	78	72	70	66	73	69	67	64	63	61	57	54
2.00	101	88	91	81	82	75	97	86	87	79	80	74	81	76	75	71	71	68	64	61
2.50	106	91	96	85	88	80	101	89	93	83	86	78	86	79	80	75	76	73	69	65
3.00	109	93	101	88	94	83	104	91	97	86	90	82	90	82	85	79	79	76	72	69
4.00	114	97	107	92	101	88	108	94	102	90	97	87	94	86	90	83	84	80	77	73
5.00	116	98	110	95	105	91	111	96	106	93	101	90	97	89	94	86	87	83	79	76
10.00	122	102	119	100	116	98	116	100	113	98	111	96	104	94	102	92	94	89	86	82

