


東芝照明器具配光データシート

名称	LEDペンダント
形名	LEDP81004PW-LD

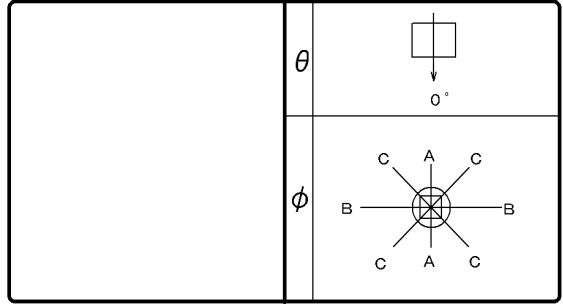

効 率	F	8 %
	F	92 %
	F	100 %
	器具 光束	4000 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	360	360	360
10°	350	350	350
20°	321	321	321
30°	279	279	279
40°	227	227	227
50°	174	174	174
60°	123	123	123
70°	77	77	77
80°	38	38	38
90°	13	13	13
100°	13	13	13
110°	14	14	14
120°	13	13	13
130°	12	12	12
140°	11	11	11
150°	10	10	10
160°	9	9	9
170°	8	8	8
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数		固有照明率 (×0.01)																		
0.60	63	58	49	47	41	40	61	56	48	46	40	39	46	44	39	38	38	37	33	31
0.80	75	68	61	57	52	50	72	66	60	56	51	49	57	54	50	48	48	47	42	40
1.00	82	73	68	63	59	56	79	71	66	62	58	55	63	60	56	54	54	52	48	45
1.25	89	79	76	70	67	63	86	77	74	69	66	62	70	66	63	60	60	59	54	51
1.50	94	83	82	74	73	68	90	81	79	73	71	67	75	70	68	65	65	63	58	56
2.00	102	89	91	82	83	76	98	86	88	80	81	75	83	77	77	72	73	70	66	63
2.50	106	92	97	86	89	81	102	89	94	84	87	79	87	81	82	77	77	74	70	67
3.00	110	94	101	89	94	84	105	92	98	87	91	83	91	84	86	80	81	77	74	71
4.00	114	97	107	93	101	89	109	95	103	91	98	88	96	88	92	85	86	82	78	75
5.00	117	99	111	95	106	92	112	97	107	93	102	91	99	90	95	87	89	84	81	78
10.00	123	102	119	101	116	99	117	100	114	99	112	97	105	95	103	94	96	90	88	84

