


東芝照明器具配光データシート

名称	LEDペンダント
形名	LEDP82005PL-LD

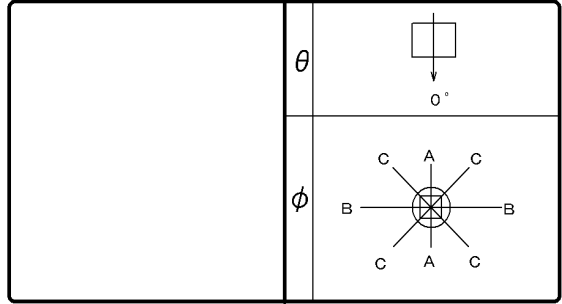

効 率	F	10%
	F	90%
	F	100%
	器具 光束	4750 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.1 H
B-B	1.1 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	364	364	364
10°	352	352	352
20°	320	320	320
30°	274	274	274
40°	221	221	221
50°	167	167	167
60°	118	118	118
70°	76	76	76
80°	41	41	41
90°	19	19	19
100°	19	19	19
110°	19	19	19
120°	18	18	18
130°	16	16	16
140°	14	14	14
150°	12	12	12
160°	11	11	11
170°	9	9	9
180°	0	0	0

反 射 率 (%)	天井	80			70			50			30		20	0							
	壁	70	50	30	70	50	30	50	30	30	30	10	0								
	床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数		固有照明率 (×0.01)																			
0.60		63	58	49	47	41	39	60	56	48	46	40	39	45	44	39	38	37	37	32	30
0.80		74	68	61	57	52	50	72	66	59	56	51	49	56	53	49	48	47	46	42	39
1.00		81	73	68	63	59	56	78	71	66	61	57	55	62	59	55	53	53	51	47	44
1.25		88	79	76	69	67	62	85	76	73	68	65	61	69	65	62	59	59	57	53	50
1.50		93	82	81	74	72	67	89	80	78	72	70	66	73	69	67	64	63	61	57	54
2.00		101	88	90	81	82	75	97	85	87	79	80	74	81	75	75	71	71	68	64	61
2.50		105	91	96	85	88	80	101	89	92	83	86	78	86	79	80	75	75	72	68	65
3.00		109	93	100	88	93	83	104	91	97	86	90	82	89	82	84	79	79	76	72	68
4.00		113	96	106	92	100	88	108	94	102	90	97	86	94	86	90	83	84	80	76	73
5.00		116	98	110	95	105	91	111	96	105	92	101	89	97	88	93	86	87	82	79	75
10.00		122	102	118	100	115	98	116	99	113	98	110	96	103	93	101	92	93	88	85	81

