


# 東芝照明器具配光データシート

名称	LEDペンダント
形名	LEDP82006PL-LD

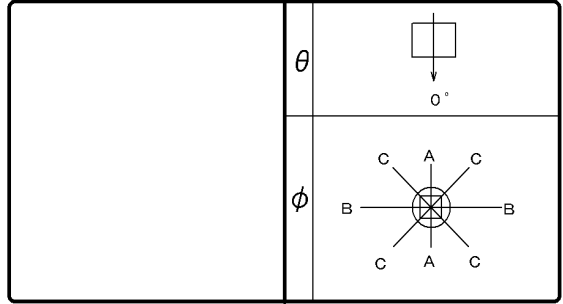

効 率	F $\frac{1}{2}$	19 %
	F $\frac{3}{4}$	81 %
	F $\bigcirc$	100 %
	器具 光束	4640 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	275	275	275
10°	273	273	273
20°	264	264	264
30°	242	242	242
40°	202	202	202
50°	155	155	155
60°	112	112	112
70°	78	78	78
80°	52	52	52
90°	36	36	36
100°	29	29	29
110°	27	27	27
120°	29	29	29
130°	31	31	31
140°	33	33	33
150°	34	34	34
160°	33	33	33
170°	28	28	28
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
室指数	固有照明率 (×0.01)																			
0.60	59	55	45	43	37	36	57	52	44	42	36	35	41	39	34	33	32	32	27	25
0.80	71	64	57	53	48	46	67	62	55	52	46	45	51	48	44	42	41	40	35	32
1.00	77	70	64	59	54	52	74	67	61	57	53	50	57	54	49	48	46	45	40	37
1.25	85	75	72	66	62	58	80	72	69	63	60	57	63	59	56	54	52	51	46	42
1.50	90	79	77	70	68	63	85	76	74	68	65	61	68	63	61	58	57	55	50	46
2.00	98	85	86	77	78	71	92	82	82	75	75	69	75	70	69	65	64	61	56	52
2.50	102	88	92	81	84	76	96	85	88	79	81	74	80	74	74	69	68	65	60	56
3.00	106	90	97	85	89	80	100	87	92	82	85	77	83	77	78	73	71	68	64	59
4.00	110	94	103	89	96	85	104	90	97	86	92	82	88	80	84	77	76	73	68	63
5.00	113	95	106	91	101	88	106	92	101	88	96	85	91	83	87	80	79	75	71	66
10.00	119	99	115	97	112	95	112	96	109	94	106	92	97	88	95	86	86	81	77	72

