


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-60413W-LD9

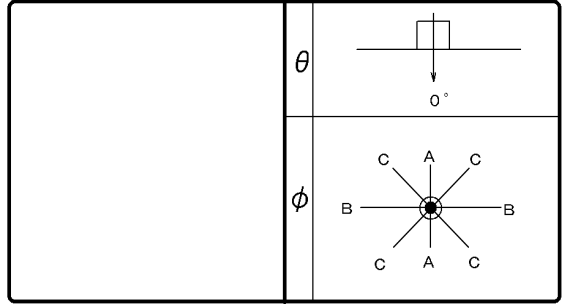

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	4520 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	塗装 (白)

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1181		
10°	1092		
20°	817		
30°	446		
40°	212		
50°	64		
60°	12		
70°	4		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																						
0.60	88	81	79	75	73	71	87	81	78	75	73	71	77	74	72	71	72	70	68	67			
0.80	100	91	91	85	86	82	98	90	90	85	85	82	88	84	84	81	83	81	79	78			
1.00	104	93	95	88	89	85	102	92	94	88	89	84	91	87	87	84	85	83	81	80			
1.25	108	96	100	91	94	88	105	95	98	91	93	88	95	90	91	87	89	86	84	83			
1.50	111	98	103	94	98	91	108	97	101	93	96	90	98	92	94	89	91	88	86	85			
2.00	116	100	109	97	104	95	112	99	106	96	102	94	102	95	98	93	95	92	90	88			
2.50	118	102	112	99	107	97	115	101	110	98	105	96	105	97	101	95	98	94	92	90			
3.00	120	103	115	101	110	98	117	102	112	100	108	98	106	98	103	96	99	95	93	92			
4.00	123	104	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	96	94			
5.00	125	105	121	104	118	102	120	104	117	103	115	102	111	101	109	100	103	98	97	95			
10.00	128	107	126	106	125	106	124	106	122	105	121	105	114	103	113	103	107	101	100	98			

