


東芝照明器具配光データシート

名称	LEDロフトペンダント
形名	LEDP-60410WWK-LS9

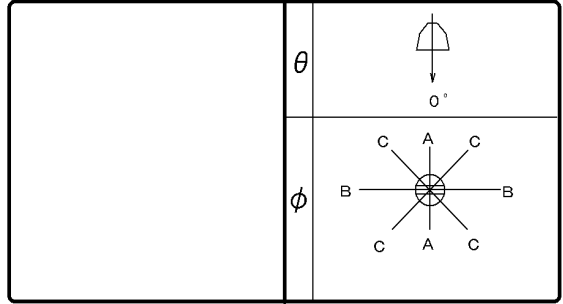

効 率	F	1 %
	F	99 %
	F	100 %
	器具 光束	4300 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	下面配光
反射面	プリズム (透明)

最大取付間隔	
A-A	0.7 H
B-B	0.7 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1694		
10°	1408		
20°	1070		
30°	435		
40°	46		
50°	8		
60°	4		
70°	2		
80°	2		
90°	1		
100°	2		
110°	3		
120°	2		
130°	2		
140°	2		
150°	2		
160°	3		
170°	4		
180°	4		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0																				
室指数	固有照明率 (×0.01)																																				
0.60	97	90	90	85	85	82	96	89	89	85	85	82	88	84	84	82	83	81	80	79																	
0.80	107	97	100	94	96	92	105	97	99	94	95	92	97	93	94	91	93	91	89	88																	
1.00	109	98	102	95	97	93	107	97	101	94	97	92	98	93	95	91	93	91	89	88																	
1.25	112	99	105	96	100	94	109	98	103	95	99	93	100	94	96	92	94	91	90	89																	
1.50	114	100	107	97	102	95	111	99	105	97	101	95	102	95	98	94	96	93	91	90																	
2.00	117	102	111	99	107	97	114	101	109	99	105	97	104	97	101	95	98	94	92	91																	
2.50	119	103	114	101	110	99	116	102	111	100	107	98	106	98	103	97	99	95	94	92																	
3.00	121	104	116	102	112	100	117	103	113	101	110	99	108	99	105	98	101	96	95	93																	
4.00	124	105	120	104	116	102	119	104	116	103	113	101	110	101	108	100	103	98	96	95																	
5.00	125	106	122	105	119	104	121	105	118	104	116	103	111	102	110	101	104	99	98	96																	
10.00	129	108	127	107	126	107	124	106	123	106	122	106	115	104	114	104	108	102	100	99																	

