


# 東芝照明器具配光データシート

名 称	LEDロフトペンダント
形 名	LEDP-60411LK-LS9

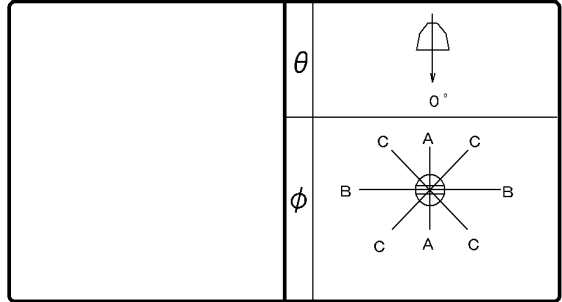

効 率	F	6 %
	F	94 %
	F	100 %
	器具 光束	3960 lm

保 守 率	良	0.67
	中	0.63
	否	0.56

前 面	下面配光
反射面	プリズム (乳白)

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備  
考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1364		
10°	1220		
20°	934		
30°	367		
40°	45		
50°	40		
60°	35		
70°	26		
80°	16		
90°	9		
100°	9		
110°	10		
120°	10		
130°	9		
140°	9		
150°	9		
160°	8		
170°	7		
180°	7		

反 射 率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数		固有照明率 (×0.01)																		
0.60	89	82	80	76	75	73	88	81	79	76	74	72	78	75	73	72	72	71	69	67
0.80	99	90	91	85	85	82	97	89	89	84	84	81	87	83	83	80	81	79	77	76
1.00	102	92	94	87	88	83	100	90	92	86	87	83	89	84	85	82	83	80	78	77
1.25	105	94	97	89	91	85	103	92	95	88	90	85	91	86	87	83	84	82	79	78
1.50	108	95	100	91	94	88	105	94	98	90	93	87	94	88	89	85	86	84	81	79
2.00	112	98	105	94	99	91	109	96	102	93	97	90	97	90	93	88	89	86	84	81
2.50	115	99	109	96	103	93	111	98	105	95	101	92	100	92	96	90	92	88	85	83
3.00	117	100	111	98	106	95	113	99	108	96	104	94	101	93	98	91	93	89	87	85
4.00	120	102	115	100	111	98	116	100	112	98	108	97	104	96	102	94	96	92	89	87
5.00	122	103	118	101	115	100	117	102	114	100	111	98	106	97	104	96	98	93	91	88
10.00	126	106	124	105	123	104	121	104	120	103	118	103	111	100	101	100	102	97	95	92

