


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-75413N-LD9

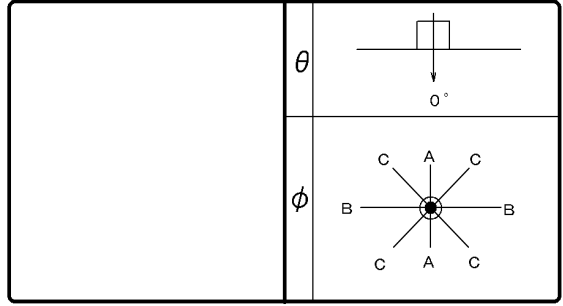

効 率	F $\frac{1}{2}$	0 %
	F $\frac{1}{4}$	100 %
	F $\circ$	100 %
	器具 光束	7650 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	塗装(白)

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考

光度(cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1141		
10°	1066		
20°	851		
30°	445		
40°	217		
50°	69		
60°	14		
70°	4		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数		固有照明率(×0.01)																																			
0.60		88	81	79	75	73	71	87	80	78	74	73	70	77	74	72	70	71	70	67	66																
0.80		99	90	91	85	85	82	98	89	90	85	84	81	88	84	83	81	82	80	78	77																
1.00		103	93	95	88	89	84	101	92	93	87	88	84	91	86	87	83	85	83	81	80																
1.25		108	96	99	91	93	88	105	95	98	90	92	87	95	89	90	87	88	86	84	82																
1.50		111	98	103	94	97	90	108	97	101	93	96	90	98	92	93	89	91	88	86	85																
2.00		115	100	109	97	103	94	112	99	106	96	102	94	102	95	98	93	95	92	90	88																
2.50		118	102	112	99	107	97	115	101	109	98	105	96	105	97	101	95	97	94	92	90																
3.00		120	103	115	101	110	98	116	102	112	100	108	98	106	98	103	96	99	95	93	92																
4.00		123	104	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	95	94																
5.00		124	105	121	104	118	102	120	104	117	103	115	102	111	101	109	100	103	98	97	95																
10.00		128	107	126	106	124	106	124	106	122	105	121	105	114	103	113	103	107	101	100	98																

