


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-95413WW-LD9

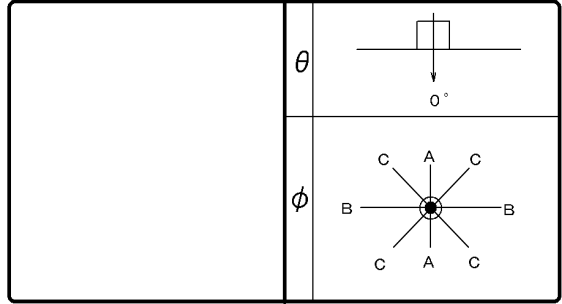

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	7320 lm

保守率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	塗装 (白)

最大取付間隔	
A-A	0.9 H
B-B	0.9 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1081		
10°	1024		
20°	813		
30°	460		
40°	217		
50°	70		
60°	14		
70°	4		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	固有照明率 (×0.01)																								
0.60	87	81	78	74	72	70	86	80	77	74	72	70	76	73	71	69	70	69	67	66					
0.80	99	90	90	85	84	81	97	89	89	84	84	81	87	83	83	80	82	80	78	76					
1.00	103	92	94	87	88	84	101	92	93	87	88	84	91	86	86	83	85	82	80	79					
1.25	107	95	99	91	93	87	105	94	97	90	92	87	94	89	90	86	88	85	83	82					
1.50	110	97	103	93	97	90	108	96	101	93	96	90	97	91	93	89	91	88	86	84					
2.00	115	100	108	97	103	94	112	99	106	96	101	94	102	95	98	92	95	91	89	88					
2.50	118	102	112	99	107	96	114	101	109	98	105	96	104	96	101	95	97	93	91	90					
3.00	120	103	115	100	110	98	116	102	112	99	108	97	106	98	103	96	99	95	93	91					
4.00	123	104	118	102	115	101	119	103	115	101	112	100	109	100	106	98	102	97	95	94					
5.00	124	105	121	104	117	102	120	104	117	103	114	101	111	101	108	100	103	98	97	95					
10.00	128	107	126	106	124	106	123	106	122	105	120	105	114	103	113	103	107	101	100	98					

