


# 東芝照明器具配光データシート

名称	LEDロフトペンダント
形名	LEDP-95411WWK-LS9

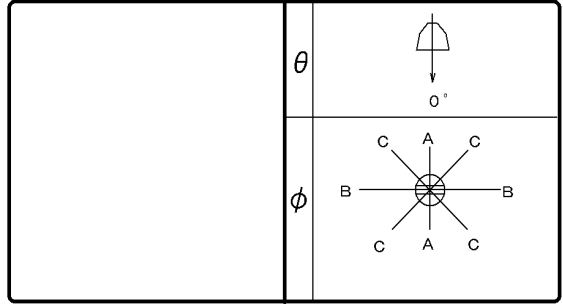

効 率	F	6 %
	F	94 %
	F	100 %
	器具 光束	6870 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	下面配光
反射面	プリズム (乳白)

最大取付間隔	
A-A	0.8 H
B-B	0.8 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1275		
10°	1155		
20°	932		
30°	389		
40°	46		
50°	42		
60°	36		
70°	28		
80°	17		
90°	9		
100°	10		
110°	10		
120°	10		
130°	10		
140°	9		
150°	9		
160°	8		
170°	7		
180°	7		

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30						
室指数	固有照明率 (×0.01)																			
0.60	88	81	79	75	74	72	87	80	78	75	73	71	77	74	72	70	71	70	67	66
0.80	98	89	90	84	84	81	96	88	89	84	83	80	86	82	82	79	80	78	76	75
1.00	102	91	93	86	87	83	99	90	91	85	86	82	88	84	84	81	82	80	77	76
1.25	105	93	96	88	90	85	102	92	94	87	89	84	91	85	86	83	84	81	79	77
1.50	108	95	100	91	94	87	105	94	97	89	92	86	93	87	89	85	86	83	80	79
2.00	112	98	105	94	99	90	108	96	102	92	97	89	97	90	93	88	89	86	83	81
2.50	115	99	108	96	103	93	111	97	105	94	100	92	99	92	96	90	91	87	85	83
3.00	117	100	111	97	106	95	113	99	108	96	103	94	101	93	98	91	93	89	86	84
4.00	120	102	115	100	111	98	116	100	111	98	108	96	104	95	101	94	96	91	89	87
5.00	122	103	118	101	115	100	117	101	114	100	111	98	106	97	104	95	98	93	91	88
10.00	126	106	124	105	123	104	121	104	119	103	118	103	111	100	110	99	102	97	95	92

