


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87948YL (C) -LSX

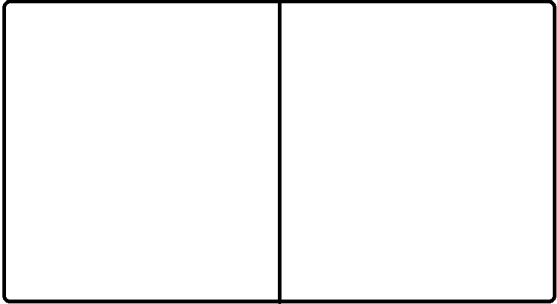

効 率	F	13 %
	F	87 %
	F	100 %
	器具 光束	210 lm

保守 率	良	0.69
	中	0.67
	否	0.63

前面	
反射面	

最大取付間隔	
A-A	1.2 H
B-B	1.4 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	227	227	227
10°	225	232	231
20°	210	232	227
30°	186	225	208
40°	157	207	189
50°	127	188	168
60°	100	167	146
70°	67	139	113
80°	34	108	81
90°	10	88	60
100°	6	67	46
110°	8	55	35
120°	1	35	16
130°	1	19	3
140°	0	1	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	固有照明率 (×0.01)																			
0.60	57	52	42	40	33	32	54	50	41	39	32	31	38	36	31	30	29	29	24	21
0.80	68	62	53	49	43	41	65	59	51	48	42	40	48	45	40	39	38	37	32	29
1.00	75	67	60	56	50	47	71	65	58	54	49	46	54	51	46	44	43	42	37	34
1.25	82	73	68	62	58	54	78	70	65	61	56	53	61	57	53	50	50	48	43	39
1.50	87	77	74	67	64	59	83	74	71	65	62	58	65	61	58	55	54	52	47	43
2.00	96	83	84	75	74	67	91	80	80	72	71	66	73	68	66	63	62	60	54	51
2.50	101	87	90	79	81	73	95	84	86	77	78	71	78	73	72	67	67	64	59	55
3.00	104	89	94	83	86	77	99	87	90	80	83	75	82	76	76	71	71	68	63	59
4.00	109	93	101	87	94	82	104	90	96	85	90	80	88	80	83	76	76	73	68	64
5.00	112	95	105	90	99	86	106	92	100	88	95	84	91	83	87	80	80	76	71	67
10.00	119	100	115	97	111	94	113	97	109	94	106	92	99	89	96	87	88	83	79	75

