


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87949YL (K) -LSX

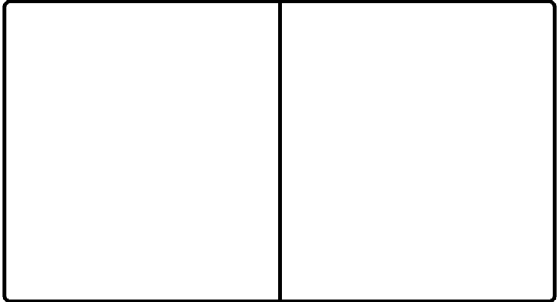

効 率	F	15 %
	F	85 %
	F	100 %
	器具 光束	205 lm

保守 率	良	0.69
	中	0.67
	否	0.63

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	249	249	249
10°	249	248	244
20°	237	241	239
30°	219	226	222
40°	189	191	191
50°	151	150	153
60°	119	122	120
70°	75	83	80
80°	34	51	45
90°	11	30	27
100°	14	34	30
110°	20	40	32
120°	13	39	33
130°	7	33	27
140°	2	22	18
150°	3	15	12
160°	5	10	10
170°	2	2	2
180°	2	2	2

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	59	55	45	43	37	35	57	52	44	42	36	35	41	39	34	33	32	32	27	25
0.80	71	64	57	53	47	45	68	62	55	52	46	44	51	49	44	42	41	41	36	33
1.00	78	70	64	59	54	52	74	67	62	57	53	50	57	54	50	48	47	46	41	38
1.25	85	76	72	66	62	59	81	73	69	64	60	57	64	60	57	54	53	52	47	43
1.50	90	80	78	70	68	63	86	77	75	68	66	62	69	64	62	59	58	56	51	47
2.00	98	86	87	78	79	72	93	83	84	76	76	70	77	71	70	66	66	63	58	54
2.50	103	89	93	82	85	77	98	86	89	80	82	75	81	75	76	71	70	67	63	59
3.00	107	91	98	86	90	81	101	88	93	83	87	79	85	78	80	75	74	71	66	62
4.00	111	95	104	90	98	86	105	92	99	87	93	84	90	82	86	79	79	75	71	67
5.00	114	97	108	93	102	89	108	94	103	90	98	87	93	85	89	82	82	78	74	69
10.00	120	101	117	98	113	96	114	98	111	96	108	94	100	90	98	89	89	84	81	76

